



DEWATERING PUMPS RCA SERIES

These versatile, portable dewatering pumps, boast brilliant design features that ensure high durability. Corrosion resistant casing, and a hardened impeller are just two of the outstanding features that make this pump a long lasting investment. Models come with suction agitation for suspension of solids.

Also available without agitator.

APPLICATIONS


- Civil sites
- Construction sites
- Mines & quarries
- Concreting plants
- Underground tunnels and car parks

FEATURES & BENEFITS

- Flow up to 20L/sec
- Max Head up to 37m
- Suitable for low water levels
- Suction agitation available on 1.5kW - 3.7kW
- Heavy duty construction
- Thermal overload protection
- Available in 415 volt only

CONSTRUCTION

- HCR - High Chromium Impeller & Suction Cover (case hardened)
- Stainless steel outer casing
- Water cooled motor
- Triple seal system

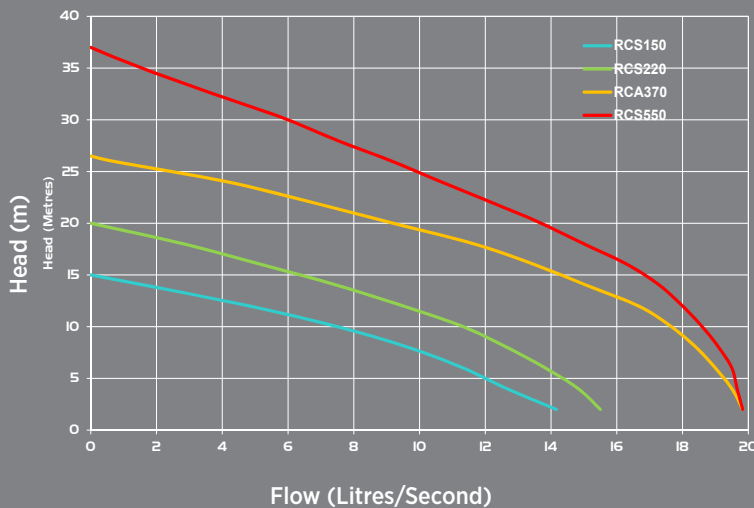

CODE	MODEL	POWER			MAXIMUM		SOLIDS HANDLING	CABLE LENGTH	OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
		VOLTS	AMPS	KW	FLOW (L/SEC)	HEAD (M)			MM	INCH		
10228	RCA150	415	3.4	1.5	14.2	15	10mm	10m	80	3"	36	260x260x499
10235	RCA220	415	4.9	2.2	15.3	20	10mm	10m	80	3"	40	260x260x499
10242	RCA370	415	8.4	3.7	20.0	26	10mm	10m	80	3"	45	260x260x529
10259	RCA550	415	10.9	5.5	20.0	37	10mm	10m	80	3"	73	286x286x623