


## WATER SHUT-OFF & LEVEL ALARM

The REEFE Water Shut-off & Level Alarm is a system controller developed to isolate the supply of Mains Water in the event of certain alarm conditions. The controller is generally used for applications where the wastewater being discharged from an ablution block is required to be pumped away. Allowing water supply to continue in the event of power failure or pump fault, could result in an overflow or environmental spill of untreated wastewater. By monitoring the level in the Outfall tank and the presence of Mains power, the controller appropriately switches the water supply Valve open or closed. The controller also incorporates 'Power On', 'Alarm' (strobe & LED) indication, as well as an Audible Siren complete with Mute button, which is activated in the event of a High Level.

### FEATURES

- Alarm with strobe & LED
- Audible Siren

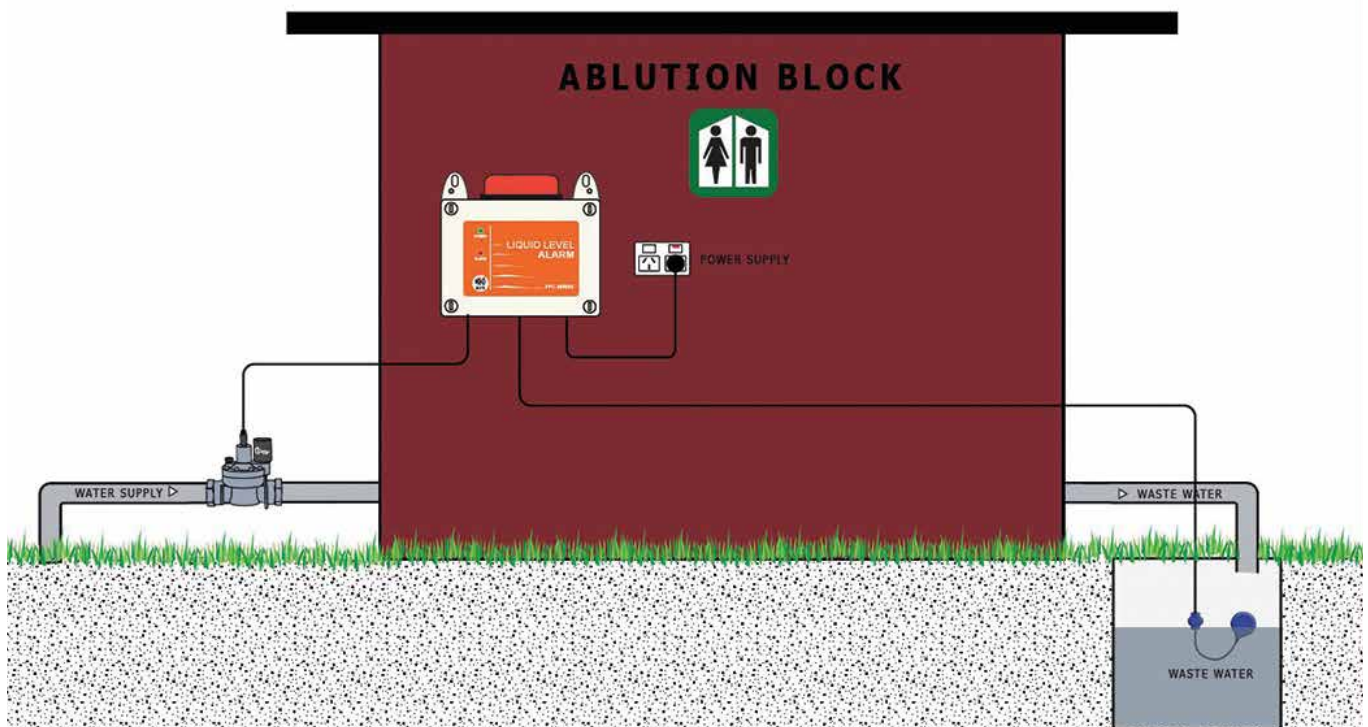

CODE	MODEL	INPUTS	CONNECTIONS	ENCLOSURE	VALVE	FLOAT
9204	Water Shut-Off & Level Alarm	240VAC Power Supply 12VDC Float Switch	240VAC Power Outlet for Pump (Constant Power) 12VDC Quick Plug Socket for Valve 12VDC Quick Plug Socket for Float Switch	IP55 Weatherproof Polycarbonate 180 x 140 x 90mm	12VDC Pulse Latching 20mm Heavy Duty Nylon 2m Lead c/w with Quick Plug Connector	9006 Nitrile Rubber Cable 10m Lead c/w Quick Plug Connector