



HIGH HEAD SUMP PUMP

RHV SERIES

This REEFE® high head sump pump with twin impellers, is specifically designed for applications with longer pipe runs. Ideal for heavy duty high lift situations. Industrial grade motor with insulation Class F. Available with standard or vertical float switch.



APPLICATIONS


- Dirty water
- Wastewater treatment systems
- Grey water
- Waste water
- Water transfer
- Industrial applications

FEATURES & BENEFITS

- Non-clogging high head twin impeller pump
- Soft solids handling 8mm
- Liquid temperature 0°C to 40°C
- Thermal overload protection
- Robust particle screen
- Adjustable “stop” vertical float switch

CONSTRUCTION

- Grade 304 stainless steel outer casing
- Twin cast iron impellers
- Insulation Class F induction motor
- Dual mechanical seal with oil chamber
- MAC 3 float switch or vertical float switch
- Stainless steel particle screen

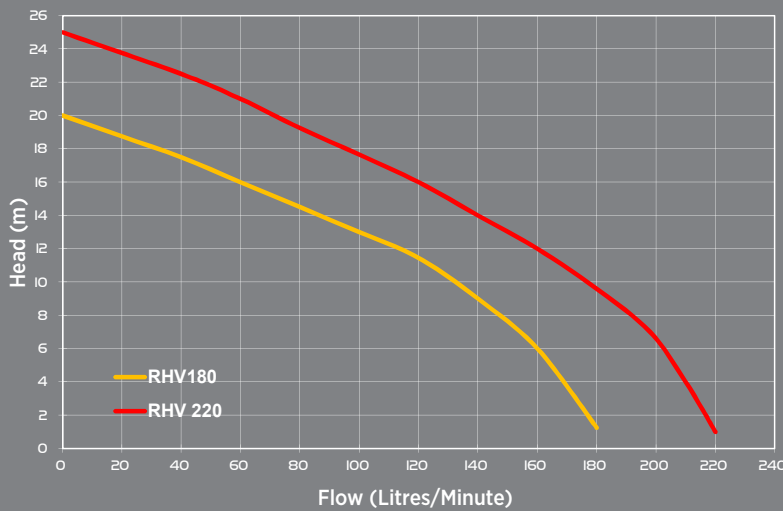

CODE	MODEL	FLOAT	POWER 240V		RATED		MAXIMUM		SOFT SOLIDS HANDLING	CABLE LENGTH	OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
			AMPS	WATTS	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)			MM	INCH		
7709	RHV180	Standard	4	400	130	10	180	20	8mm	10m	40	1½	15	227 x 160 x 370
13472	RHV180-VF	Vertical												210 x 220 x 385
7716	RHV220	Standard	6	750	130	15	220	25	8mm	10m	50	2	22	240 x 170 x 390
13489	RHV220-VF	Vertical												210 x 220 x 410