



DOUBLE CASE PUMPS

RDC SERIES

The REEFE® RDC series pumps incorporate the same high quality REEFE® construction while offering a lightweight design in grade 304 stainless steel. The water cooled motor design makes them the ideal pump for surface water drainage applications.

APPLICATIONS


- Surface water
- Storm water pits
- Irrigation chambers
- Wastewater treatment systems
- Grey water
- Pool emptying
- Basement sumps
- Garden pond waterfalls
- Pond filtration systems

FEATURES & BENEFITS

- Motor is cooled by the pumped liquid, continuous rated
- Allows for pumping to lower levels
- 304 stainless steel construction
- Dual mechanical seals
- Thermal overload protection for the motor
- Handle for easy handling and inspection
- Maximum immersion 5m
- Maximum liquid temperature 40°C

CONSTRUCTION

- Grade 304 stainless steel casing
- PPO impeller
- Dual mechanical seal in oil chamber - silicone carbide / carbon on impeller side, carbon/ceramic on the motor side
- Depth adjustable float switch
- 5m H05RNF cable
- Screened base
- Motor Insulation Class B

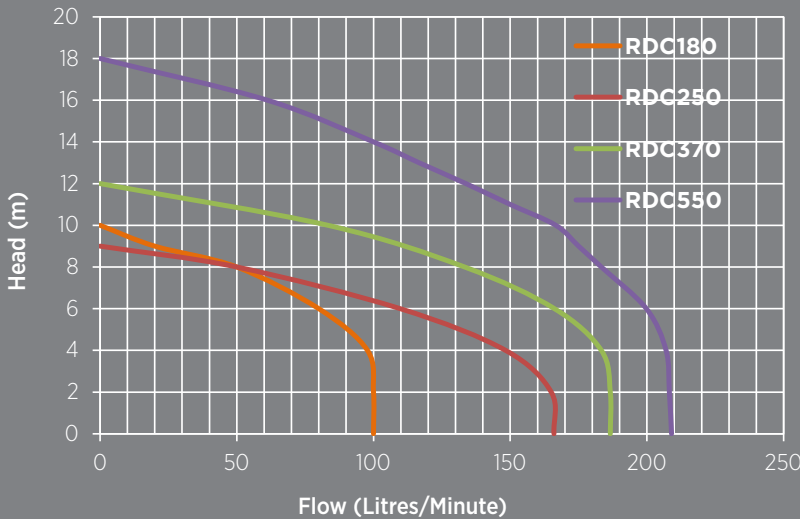

CODE	MODEL	POWER 240V		RATED		MAXIMUM		SOFT SOLIDS HANDLING	CABLE LENGTH	OUTLET (MM)	WEIGHT (KG)	SIZE L X W X H (MM)
		AMPS	WATTS	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)					
13977	RDC180	1.4	180	50	8	100	10	4mm	5m	32 FBSP	6.5	150 x 315 x 250
13984	RDC250	2.0	250	80	7	150	9	4mm	5m	32 FBSP	7.5	150 x 150 x 290
13991	RDC370	3.2	370	110	9	170	12	4mm	5m	32 FBSP	8.5	185 x 185 x 360
14363	RDC550	4.3	550	100	14	216	18	4mm	5m	40 FBSP	12.3	150 x 290 x 355