

# DRAINAGE PUMPS

## RDP SERIES

For drainage of liquids with small solids in suspension, these tough performers are built to the highest quality standard to guarantee a lasting investment. Ideal for use in stormwater pits. Commonly used in pump stations.



### APPLICATIONS


- Stormwater
- Shopping centres & commercial buildings
- Basement car parks
- Industrial processes
- Flood control

### FEATURES & BENEFITS

- Flows up to 28L/sec
- Max head up to 28.5m
- Auto coupling kits available for larger models
- 240v and 415v dependent on size
- Thermal overload protection
- Up to 35mm solids handling capacity

### CONSTRUCTION

- Dual mechanical silicon carbide seal in oil bath (RDP075 single seal)
- Class E insulation - IP68 rated
- S/S grade 304 multi-vane semi open impeller on RDP models
- MAC 3 Italian made float switch on selected models
- HO7RNF cable - 10m

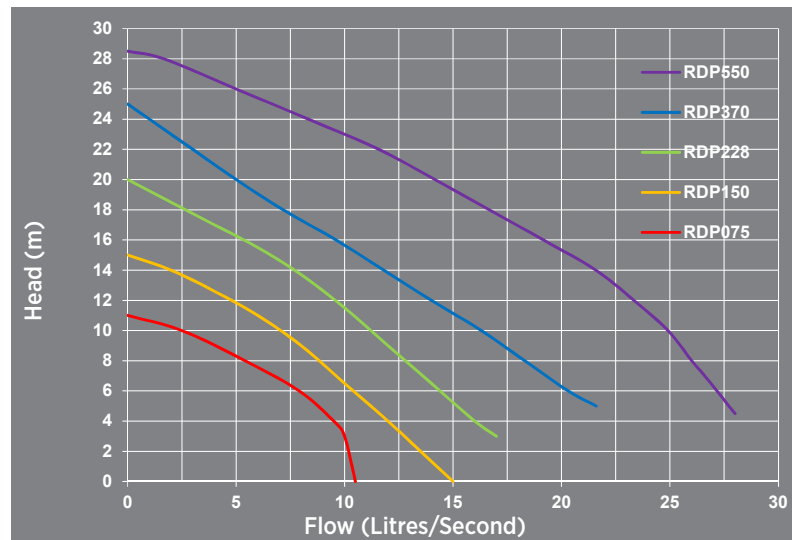

**NOTE**

Refer to page 26 for RVS200 & 300 performance curves

CODE	MODEL	OPERATION	POWER			MAXIMUM		SOLIDS HANDLING	CABLE LENGTH	OUTLET (MM)	WEIGHT (KG)	SIZE L X W X H (mm)
			VOLTS	AMPS	WATTS	FLOW (L/SEC)	HEAD (M)					
10051	RVS200-S	Auto	240	2	0.25kW	3.3	8	8mm	10m	40	9	190 x 130 x 320
18675	RVS200-S-VF											
10068	RVS300-S	Auto	240	4	0.4kW	5	10	8mm	10m	50	10	220 x 150 x 360
18682	RVS300-S-VF											
7457	RDP075	Auto	240	5.5	0.75kW	10.5	11	10mm	10m	80	20	260 x 170 x 380
7464	RDP150	Auto	240	11	1.5kW	15	15	20mm	10m	80	35	363 x 202 x 571
7471	RDP150-3	Manual	415	3.4								
7679	RDP228	Manual	415	4.4	2.2kW	17	20	30mm	10m	80	49	280 x 216 x 493
7686	RDP370	Manual	415	7.8	3.7kW	21.6	25	35mm	10m	100	55	438 x 236 x 700
7693	RDP550	Manual	415	11.8	5.5kW	28	28.5	35mm	10m	100	80	597 x 307 x 723