




DUAL HOT WATER CIRCULATOR PUMP SETS STANDARD

The Reefer® Standard Hot/Cold water circulator pump sets can be used in a range of applications including domestic and commercial buildings to save water and time, and cooling and heating of machinery and other processes. Circulator pumps, consisting of a control panel and pumps mounted on a vertical steel frame, are designed to circulate water from a storage tank through a ring-main system and back to the storage tank for re-heating.

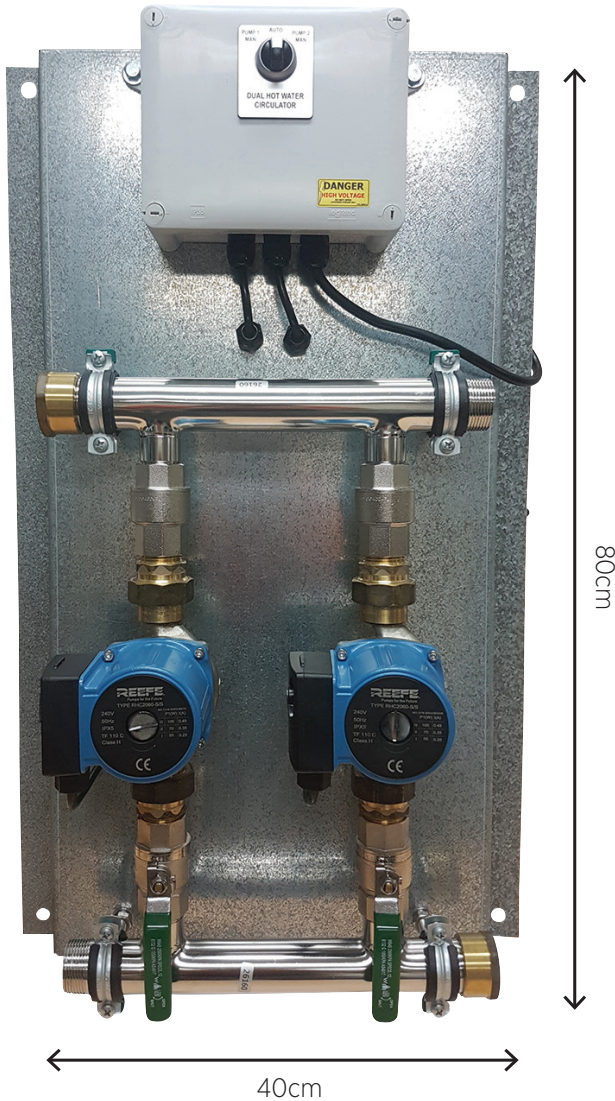

APPLICATIONS

- Domestic and light commercial hot water circulating
- Laundries
- Laboratories
- Hydroponics
- Hotels, motels and aged care facilities
- High rise buildings
- Hot water and cold water circulating

FEATURES & BENEFITS

- Pumps constructed from non corrosive material
- Pre-plumbed and pre-wired ready for installation
- 24-hour/ 7-day time clock
- Easy to use dual pump controller
- No provision for thermostat input

CONSTRUCTION

- Heavy duty galvanised wall bracket
- 25mm stainless steel manifolds
- 25mm valves and unions
- Weatherproof poly enclosure

NOTE Refer to page 100 for further information on the Economy Dual Hot Water Pump Controller

CODE	PUMP MODEL	CONTROL PANEL	DESCRIPTION
18705	RHC2060	Economy	REEFE® Dual hot water circulating pump system. Comprising of two (2) 240 volt RHC2060 pumps, economy alternating pump controller and stainless steel pump manifolds with valves and fittings mounted on galvanised steel wall brackets.
18729	RHC3280	Economy	REEFE® Dual hot water circulating pump system. Comprising of two (2) 240 volt RHC3280 pumps, economy alternating pump controller and stainless steel pump manifolds with valves and fittings mounted on galvanised steel wall brackets.