

# RHC2060 HOT WATER CIRCULATOR PUMP

## RHC SERIES



This 3 speed circulating pump is ideal for ring main applications in domestic or commercial systems. Quiet, reliable and low power consumption are just some of the great features of this pump. It comes standard with brass barrel union & and a 1.5m plugged cable.



### APPLICATIONS


- Hot water circulating
- Commercial or domestic hot water systems
- Air-conditioning cooling systems
- Solar hot water systems
- Hotels & Motels

### BENEFITS

- In line pump casing
- Options for 20 or 25 MBSP connections
- 3 speed variable adjustment
- Low power consumption
- Reliable, maintenance free
- Operating pressure 10 bar
- Thermal overload
- Liquid temperature 2° to 110°C
- Tested to AS4020 for Potable Water

### CONSTRUCTION

- Stainless Steel pump casing
- Ceramic motor shaft
- PES composite impellers
- Ceramic bearing & EPDM seals
- IP44 motor & insulation class H
- 1" x 3/4" brass union set supplied

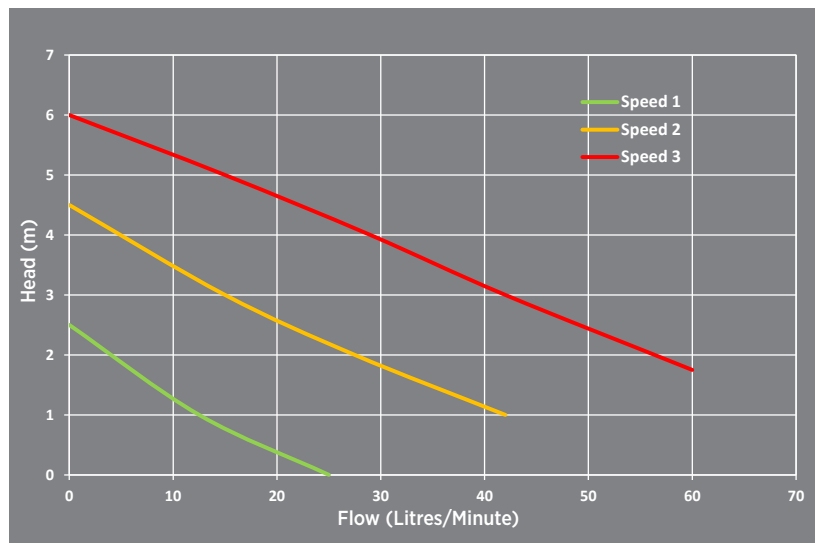

**NOTE** \*This pump must be protected from the weather

CODE	MODEL	SPEED	POWER 240V		HEAD (M)	FLOW (L/MIN)
			AMPS	WATTS		
7372.SS	RHC2060-S/S	3	0.45	100	6	60
		2	0.35	70	4.5	42
		1	0.25	55	2.5	25

SIZE (L) bare pump	SIZE (L) with barrel union
PORT TO PORT	LENGTH
130mm	185mm
PORTS	UNION
1" MBSP	3/4" MBSP