



CUTTER PUMPS

RIC & RCP SERIES

These cutter pumps are designed for drainage of liquids containing stringy fibrous material. They are tough performers that are built to the highest standard to guarantee a lasting investment. The motor is precision manufactured with stringent quality control to ensure consistent reliability and endurance. Available as packaged pump stations with pump well included.

APPLICATIONS


- Trade waste
- Waste treatment facilities
- Sewage**
- Farm waste

FEATURES & BENEFITS

- Flows up to 17L/sec
- Max head up to 20m
- Thermal overload protection
- Auto coupling kits available
- Manual and float switch (auto) options

CONSTRUCTION

- 240 volt and 3 phase (415V) version available
- Triple seal system in the 1.5kW and larger, lip seal and double silicone-carbide/ceramic mechanical seal with oil chamber
- Carbon/ceramic mechanical seal with lip seal and oil chamber in the 0.4 to 0.75kW versions
- Large capacity oil chamber with protective lip seal
- Non-clog impeller with tungsten blade*
- IP68 with class F insulation
- 10m H07RNF grade cable

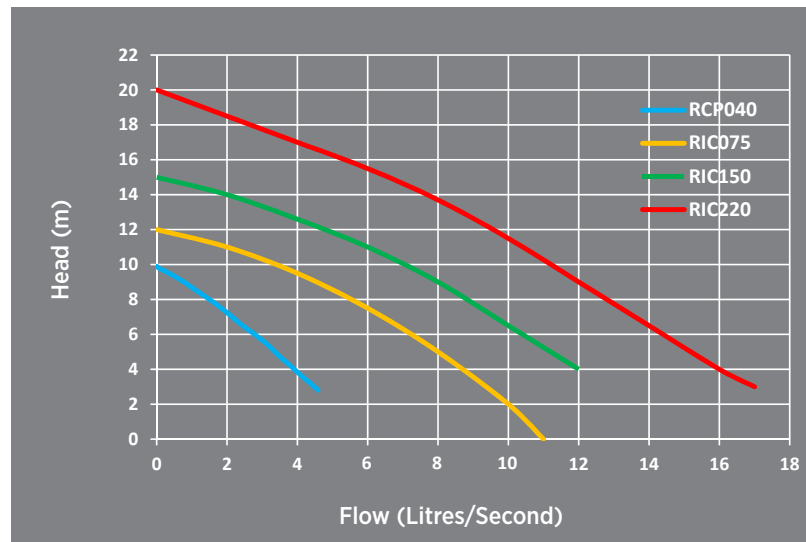

NOTE *Design will vary depending on model

****IMPORTANT NOTICE:** we do not endorse Cutter Pumps for PUBLIC FACILITIES & RENTAL applications due to the common incidence of non-sewage articles being placed in the sewer. Use GRINDER Pumps for sewer in all facilities other than owner-occupied domestic situations.

CODE	MODEL	OPERATION	POWER			MAXIMUM		SOLIDS HANDLING	CABLE LENGTH	OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
			VOLTS	AMPS	KW	FLOW (L/SEC)	HEAD (M)			MM	INCH		
7556	RCP040A	Auto	240	1.2	0.4	5	10	15mm	10m	50	2"	18	245 x 188 x 420
10716	RIC075A	Auto	240	5.5	0.75	11	12	35mm	10m	50	2"	21	276x234x492
12000	RIC075.3	Manual	415	1.8									
10723	RIC150A	Auto	240	9.8	1.5	12	15	32mm	10m	80	3"	34	270x258x530
10730	RIC150.3	Manual	415	3.4									
10747	RIC220.3	Manual	415	4.7	2.2	17	20	35mm	10m	80	3"	34	270x258x530
7648	REEFE® Cutter Auto Coupling Kit - 3" (Guide Rail Kit - for RCP07A, 150A & 150M)												