



GRADE 316 STAINLESS STEEL CENTRIFUGAL PUMPS

RSSC SERIES

Another REEFE pump of exceptional quality. High performing and heavy duty, these pumps are suitable for moving clean fresh water and clean saltwater.

APPLICATIONS


- Ideal for dairy pump
- Water Transfer
- Wash Down
- Chemical Dosing Transfer
- Sea Water Transfer

FEATURES & BENEFITS

- Suitable for liquid temperatures up to +70°C
- Continuous duty
- Corrosion resistant materials

CONSTRUCTION

- Single phase motor
- Grade 316 stainless steel wet-end
- Thermal overload protection
- Mechanical seal: carbon-ceramic/NBR
- PUMP CONTROL OPTIONS:
 - REEFE Pressure Controller*
 - REEFE Pressure Switch and Tank*
 - REEFE Variable Speed Control*
- Ingress Protection IP55
- Insulation Class F

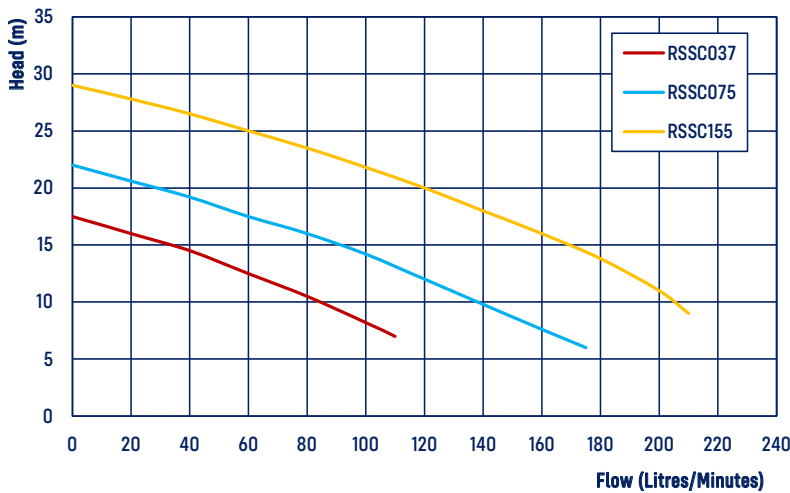

NOTE

*Components of Controllers NOT SUITABLE for saltwater applications

CODE	MODEL	POWER 240V			RATED		MAXIMUM		SUCTION LIFT	INLET		OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
		AMPS	P1 (kW)	P2 (kW)	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)		MM	IN	MM	IN		
17159	RSSC037	2.4	0.55	0.37	40	14	110	17	No	32	1¼"	25	1"	7.5	330x190x240
30790	RSSC075	4.2	1.11	0.75	80	16	175	22	No	40	1½"	25	1"	10.3	360x245x280
17241	RSSC155	9.2	2.12	1.5	100	22	210	29	No	40	1½"	25	1"	19	420x260x295