



PREMIUM VORTEX SUMP PUMP

RVS SERIES

This REEFE submersible vortex pump has been specifically designed for sump pump out applications. Solid cast-iron and stainless steel construction for robust and reliable pumps on which you can depend. Capable of handling soft solids up to 15mm.

APPLICATIONS

- Dirty water transfer
- Greywater
- Household wastewater
- Sump draining
- Pool emptying
- Wastewater systems

FEATURES & BENEFITS

- Solids handling 15mm
- High performance
- Thermal overload protection
- 10m power cable, HO5RN-F
- Includes 3 different hoesetails - 25/32/40mm
- Includes lifting rope
- Max liquid temperature 40°C
- Max ambient temperature 40°C
- Electrical Safety Approval to AS/NZS 60335.2.41

CONSTRUCTION


- Stainless steel motor housing and shaft
- Technopolymer vortex impeller with special sand-flinging design to reduce clogging and wear
- Dual silicon carbide/ceramic mechanical seal with oil chamber
- MAC 3 type float switch, depth adjustable
- Ingress Protection IP68
- Insulation Class B
- Cast iron base and outlet



RVS155M



RVS155

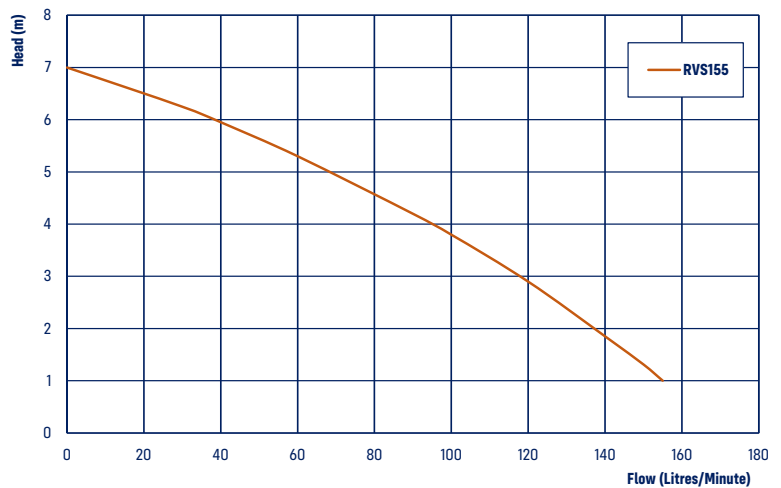

| CODE | MODEL | POWER 240V | | | RATED | | MAXIMUM | | SOFT SOLIDS HANDLING (MM) | CABLE LENGTH (M) | OUTLET | | WEIGHT (KG) | SIZE L X W X H (MM) |
|-------|---------|------------|---------|---------|--------------|----------|--------------|----------|---------------------------|------------------|--------|------|-------------|---------------------|
| | | AMPS | P1 (kW) | P2 (kW) | FLOW (L/MIN) | HEAD (M) | FLOW (L/MIN) | HEAD (M) | | | MM | IN | | |
| 8409 | RVS155 | 1.5 | 0.35 | 0.18 | 90 | 4.0 | 155 | 7.0 | 15 | 10 | 32 | 1 ¼" | 8.5 | 220x120x340 |
| 16770 | RVS155M | 1.5 | 0.35 | 0.18 | 90 | 4.0 | 155 | 7.0 | 15 | 10 | 32 | 1 ¼" | 8.5 | 220x120x340 |