

## RHC2060 HOT WATER CIRCULATOR PUMP

### RHC SERIES



This 3 speed circulating pump is ideal for ring main applications in domestic or commercial systems. Quiet, reliable and low power consumption are just some of the great features of this pump. It comes standard with brass barrel union & a 1.5m plugged cable.

#### APPLICATIONS

- Hot water circulating
- Commercial or domestic hot water systems
- Air-conditioning cooling systems
- Solar hot water systems
- Hotels & Motels

#### FEATURES & BENEFITS


- In line pump casing
- Options for 20mm or 25mm MBSP connections
- 3 speed variable adjustment
- Low power consumption
- Reliable, maintenance free
- Operating pressure 10 bar
- Thermal overload
- Liquid temperature 2°C to 110°C
- Certified to AS/NZS4020 for use with potable water

#### CONSTRUCTION

- GR 304 Stainless Steel pump casing
- Ceramic motor shaft
- PES composite impellers
- Ceramic bearing & EPDM seals
- 25mm x 20mm brass union set supplied
- Ingress Protection IP44
- Insulation Class H



**Adaptors, Unions & O-rings available with pump**

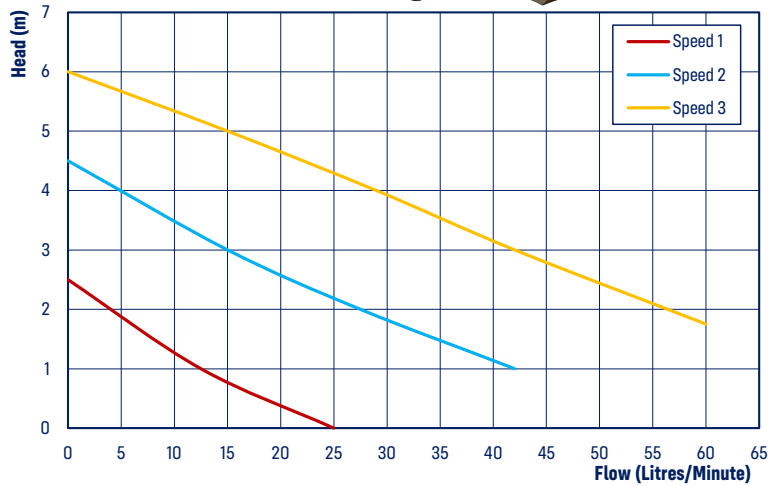

#### NOTE

\*This pump must be protected from the weather

CODE	MODEL	SPEED	POWER 240V		HEAD (M)	FLOW (L/MIN)
			AMPS	kW		
15285	RHC2060-S/S	3	0.45	1.0	6	60
		2	0.35	0.70	4.5	42
		1	0.25	0.55	2.5	25

SIZE (L) bare pump	SIZE (L) with barrel union
PORT TO PORT (MM)	LENGTH (MM)
130	185
PORT TO PORT (MM)	UNION (MM)
25 MBSP	20 MBSP