



## RHC3280 HOT WATER CIRCULATOR PUMP

RHC SERIES

This 3 speed circulating pump is ideal for ring main applications in domestic or commercial systems. Quiet, reliable and low power consumption are just some of the great features of this pump. It comes standard with barrel union.

### APPLICATIONS

- Hot water circulating
- Commercial or domestic hot water systems
- Air-conditioning cooling systems
- Solar hot water systems
- Hotels & Motels

### FEATURES & BENEFITS


- In line pump casing
- 3 speed variable adjustment
- Low power consumption
- Reliable, maintenance free
- Max operating pressure 10 bar
- Thermal overload
- Liquid temperature 2°C to 110°C
- Max ambient temperature 40°C
- Options for 32mm FBSP or 50mm MBSP connections
- Certified to AS/NZS4020 for use with potable water

### CONSTRUCTION

- GR 304 Stainless steel pump casing
- Ceramic motor shaft
- PES composite impellers
- Ceramic bearing & EPDM seals
- Stainless steel barrel unions supplied with pump
- Ingress Protection IP44
- Insulation Class H



Adaptors, Unions & O-rings available with pump

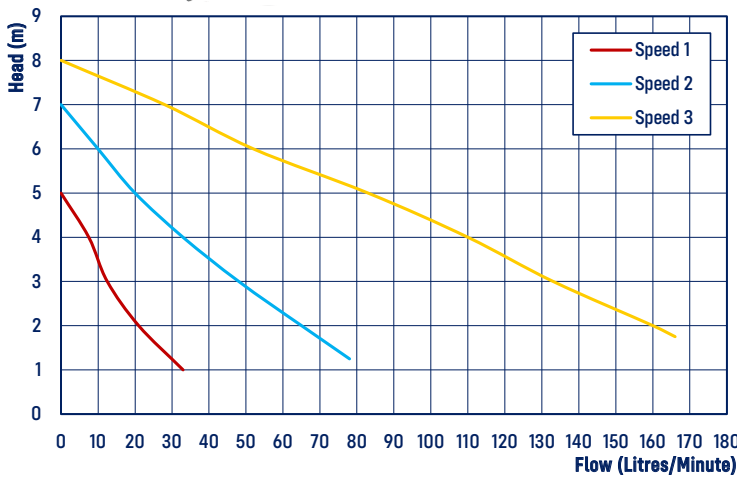

**NOTE** \*This pump must be protected from the weather

CODE	MODEL	SPEED	POWER 240V		HEAD (M)	FLOW (L/MIN)
			AMPS	WATTS		
18828	RHC3280	3	1.1	245	8.2	166
		2	0.85	190	7	77
		1	0.6	135	5	33

SIZE (L) bare pump	SIZE (L) with barrel union
PORT TO PORT (MM)	LENGTH (MM)
180	230
PORT TO PORT (MM)	UNION (MM)
50 MBSP	32 MBSP