


LIQUID LEVEL ALARM DELUXE OUTDOOR

The REEFE Liquid Level Alarms are designed to provide warning indication when a storage tank is either empty or full. The buzzer can be muted via a mute button. If not muted the audible buzzer will automatically silence after 5 minutes. If a continuously sounding audible alarm is required, this can be done by changing the jumper position on the circuit board. Both the audible and visual alarm will run for up to 6 hours. The visual alarms will continue to remain on, until the alarm condition is resolved. A standard feature of the Level Alarm is a 'Voltage Free' (5 amp rated) output for connection to auxiliary devices. Controller can be installed up to 50m from the tank being monitored. Float switch cabling is 'safe', low voltage circuitry. Warning indication is determined by a float switch. Warnings are Audio (buzzer) and Visual (LED Pilot Light and / or Strobe)

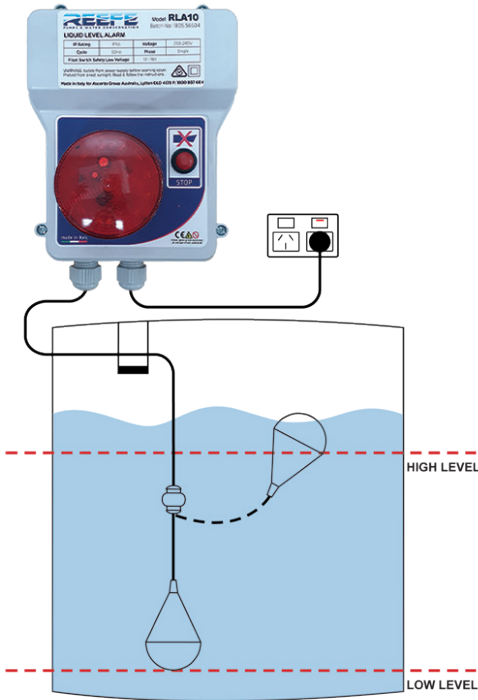

FEATURES & BENEFITS

- Warning indication for storage
- Ideal for high or low level in storage tanks
- Suitable for below or above ground tanks
- Supplied standard with a quick-connect 10m float switch with 6.35mm Mono plug for ease of connection (3m, 5m, 20m options also available)
- Controller can be installed up to 50m from tank (longer cable required on float switch)
- Safe 12V low voltage cabling on float switch
- Can be installed for High Level or Low Level alarms
- Mute button to silence alarm
- IP55 enclosure for outdoor installation
- Audible Alarm sound level is 90dB

CODE	MODEL	DESCRIPTION	FLOAT SWITCH (M)	INPUT VOLTAGE	FLOAT VOLTAGE
24379	RLA10	Deluxe Liquid Level Alarm with quick-connect float	3	240V	12V
20340			5		
19344			10		

LIQUID LEVEL ALARM DELUXE OUTDOOR WITH BATTERY BACK-UP

Since power failure at a pump station generally means a loss of the alarm features, there is a requirement for a 'Battery Back Up' Level Alarm. All features of the standard and deluxe models are common to this device however the unique feature of this product, is the provision of battery backup. Continuously charged by mains 240VAC power supply, the unit's battery has sufficient capacity to drive the audible alarm for a period of 5 minutes and the visual alarm for a period of 12 hours after power failure has occurred. The battery is rated for continuous charging.



FEATURES & BENEFITS

- Continuously charged by mains 240VAC
- Ideal for effluent, greywater or rain water tanks
- Suitable for below or above ground tanks
- Safe low voltage cabling float switch
- Audio & visual alarm on high level event
- Continues to monitor the liquid level during power failure
- Solar powered options available upon request - enquire for more detail
- Audible Alarm sound level is 90dB

CODE	MODEL
19351	Liquid Level Alarm with Float Switch and Strobe and Battery Backup
4999	Liquid Level Alarm with Battery Backup and Solar Panels