

FIREFIGHTING PUMP SINGLE IMPELLER

GP & RP SINGLE IMPELLER SERIES



These Premium grade Honda powered pumps are engineered with quality materials to produce an exceptionally reliable pump. Available in Recoil and Electric start, they are a very versatile pump for many applications pumping clean water.

APPLICATIONS

- Fire-fighting
- Boom spraying
- Wash-down applications
- Water transfer

FEATURES & BENEFITS

- Genuine GP160 HONDA engine - backed by Honda 1 year universal warranty
- Genuine GX160 & GX200 HONDA engine - backed by Honda 3 year universal warranty
- 2 year warranty on wet-end and roll frame
- Self-priming 6 metres, with foot valve
- Engine with oil sensor
- Available with or without roll frame
- Wiring harness available as an option for battery connection

NOTE: Battery and leads not included with Electric Start option
Use a 12 Volt battery with an ampere -hour rating of at least 18Ah

CONSTRUCTION

- Alloy closed vane impeller and volute
- Heavy duty cast inlets and outlets
- ¾" threaded shaft




GP160 | RECOIL

SUCTION LIFT INFO	
Suction Head (m)	Max Flow (L/Min)
0	380
-1.5	361
-3	342
-4.5	311
-6	266



GX160 & GX200 | RECOIL

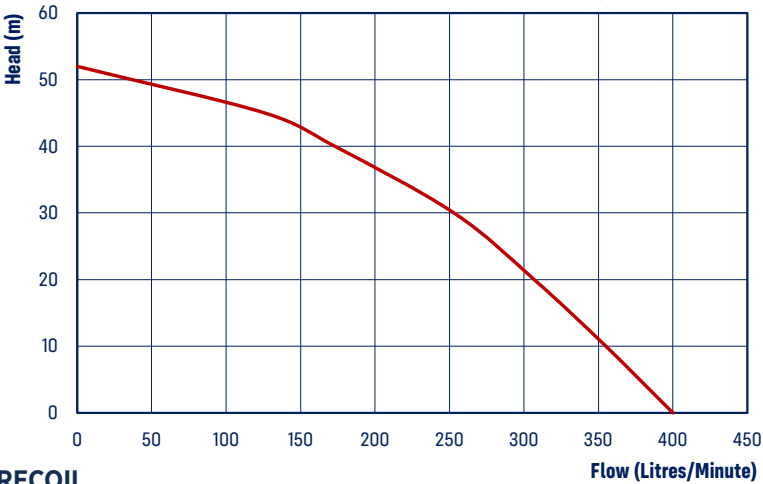

CODE	MODEL	ENGINE HONDA	START	ROLL FRAME	FUEL TANK	SUCTION SIZE	DISCHARGE SIZE	MAX HEAD (M)	MAX FLOW RATE (L/MIN)	PUMP BODY	HORSE POWER CLASS	WEIGHT (KG)
17807	GP015R	GP160	Recoil	-	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	5.5	26
17814	GP015R-RF	GP160	Recoil	Yes	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	5.5	30
20166	RP015R-2	GX160	Recoil	-	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	5.5	26
5965	RP015R-RF-2	GX160	Recoil	Yes	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	5.5	30
8447	RP015R	GX200	Recoil	-	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	6.5	26
6641	RP015R-RF	GX200	Recoil	Yes	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	6.5	30
8591	RP015E	GX200E	Electric	-	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	6.5	26
6719	RP015E-RF	GX200E	Electric	Yes	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	6.5	30