



DRAINAGE PUMP

RDP SERIES

For drainage of liquids with small solids in suspension, these tough performers are built to the highest quality standard to guarantee a lasting investment. Ideal for use in stormwater pits. Commonly used in pump stations.

APPLICATIONS


- Stormwater
- Shopping centres & commercial buildings
- Basement car parks
- Industrial processes
- Flood control

FEATURES & BENEFITS

- Flows up to 28L/sec
- Max head up to 28.5m
- Auto coupling kits available for larger models
- Larger sizes in 3-Phase 415V only
- Thermal overload protection
- Up to 35mm solids handling capacity
- Electrical Safety Approval to AS/NZS 60335.2.41

CONSTRUCTION

- Dual mechanical silicon carbide seal in oil bath (RDP075 single seal)
- S/S grade 304 multi-vane semi open impeller on RDP models
- MAC 3 Italian made float switch on selected models
- H07RN-F cable - 10m
- Ingress Protection IP68
- Insulation Class F

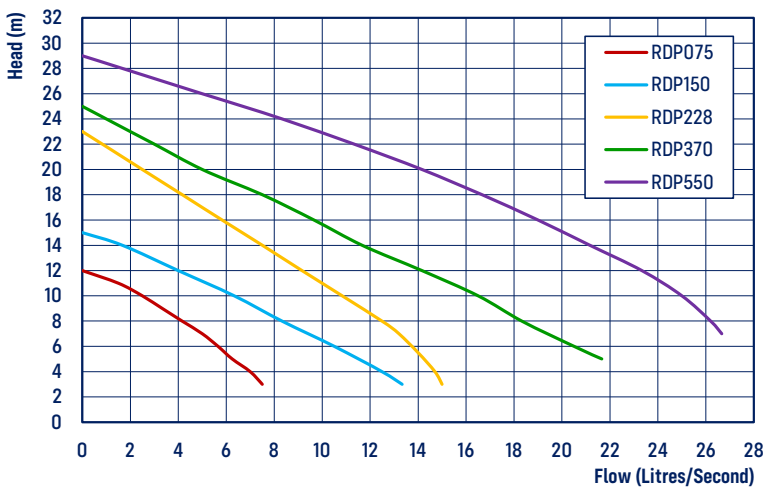

CODE	MODEL	OPERATION	POWER				MAXIMUM		SOLIDS HANDLING (MM)	CABLE LENGTH (M)	OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
			VOLTS	AMPS	P1 (kW)	P2 (kW)	FLOW (L/SEC)	HEAD (M)			MM	IN		
7457	RDP075	Auto	240	5.5	1.4	0.75	7.5	12	10	10	50	2"	20	260x170x380
22030	RDP075M	Manual					7.5	12			80	3"		
7464	RDP150	Auto	240	11.1	1.9	1.5	13.3	15	20	10	80	3"	35	363x202x571
7471	RDP150-3	Manual	415	3.4										
7679	RDP228	Manual	415	4.4	2.89	2.2	15	23	30	10	80	3"	49	280x216x493
7686	RDP370	Manual	415	7.8	4.35	3.7	23.3	25	35	10	100	4"	55	438x236x700
7693	RDP550	Manual	415	11.8	6.1	5.5	26.6	29	35	10	80	3"	80	597x307x723
22344	Guiderail Kit Pedestal SH80 suits 3" / 80mm outlet (RDP150 & RDP228)													