



AXIAL FLOW PUMP

RAF SERIES

These compact, high performance pumps have low noise levels, reduced cooling issues, making the installation and operating costs attractive. Their unique design features maximize reliability to ensure minimal maintenance is required.

APPLICATIONS



- Stormwater and flood control
- Aquaculture
- High volume dewatering
- Flood irrigation
- Wastewater treatment facilities
- Wetland level control
- Industrial applications

FEATURES & BENEFITS

- Flow up to 1300L/sec
- Max Head up to 7.5m
- Thermal overload protection
- Available in 415 Volt only
- Electrical Safety Approval to AS/NZS 60335.2.41

CONSTRUCTION

- Water cooled motor
- Triple seal system
- Free standing or well type
- Ingress Protection IP68

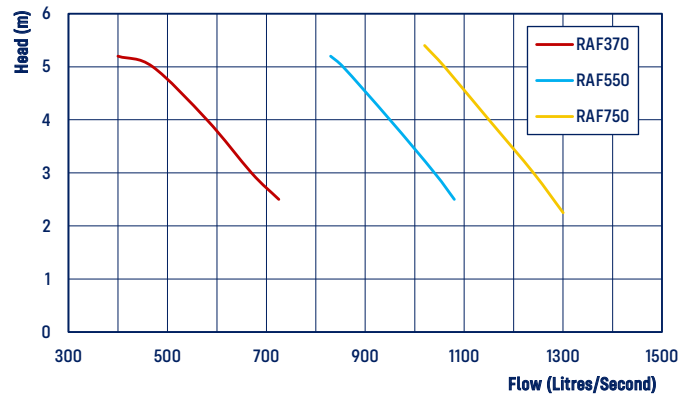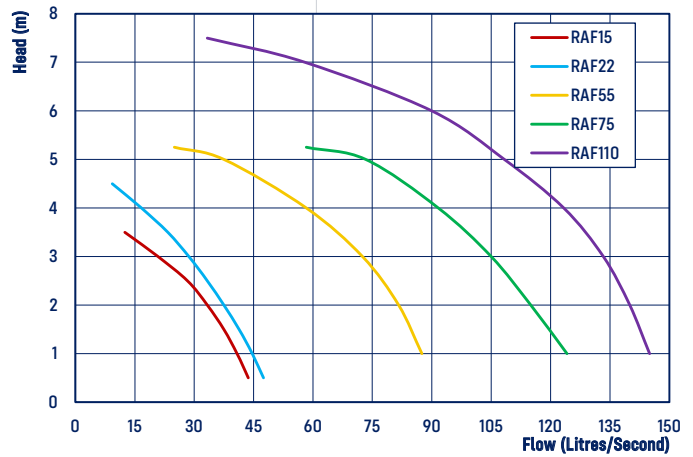

CODE	MODEL	POWER 415V		MAXIMUM		SOLIDS HANDLING (MM)	CABLE LENGTH (M)	OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
		AMPS	P2 (kW)	FLOW (L/SEC)	HEAD (M)			MM	IN		
10365	RAF15	3.8	1.5	46	3	20	10	150	6"	50	285x285x638
10372	RAF22	5	2.2	47	5	20	10	150	6"	52	285x285x638
10389	RAF55	11.1	5.5	87	5	22	10	200	8"	122	340x340x923
10396	RAF75	14.8	7.5	120	5	22	10	250	10"	164	380x380x1015
10402	RAF110	21	11	145	7.5	23	10	300	12"	209	430x430x1077
10419	RAF370	80	37	730	5	-	10	550	22"	1180	780x780x1960
10426	RAF550	115	55	1080	5	-	10	700	32"	2060	870x870x2760
10433	RAF750	182	75	1300	5	-	10	700	32"	2130	870x870x2760