



## GRINDER & MACERATOR PUMP

### REG SERIES

The REEFE REG015 macerator pump is the perfect all-rounder when it comes to wastewater. The hybrid design means you get higher flows like a cutter pump but with higher head pressure and grinding benefits of a grinder. The external cutter mechanism means the solids are cut before entering the pump which means less blockages and much easier maintenance. Suitable for industrial, agricultural, mining and dairy wastewater transfer applications.

#### APPLICATIONS

- Industrial wastewater
- Animal effluent waste
- Mining camp wastewater
- Dairy waste transfer
- Suitable for pumping sewage containing organic waste, paper, mud and sand


#### FEATURES & BENEFITS

- Liquid temperature 0°C to 40°C
- PH Range 4.0 to 10.0
- Unique anti-clogging impeller design
- Float Switch for automatic operation
- Thermal overload protection
- Electrical Safety Approval to AS/NZS 60335.2.41

#### CONSTRUCTION

- Pump body: stainless steel (AISI304)
- Cast iron impeller
- Stainless steel motor shaft
- Silicone-carbide/ceramic mechanical seal
- Cast iron base
- Grinder mechanism made of hardened S/S grade 44 HRC
- Ingress Protection IP68
- Insulation Class B

INDUSTRIAL SUBMERSIBLE

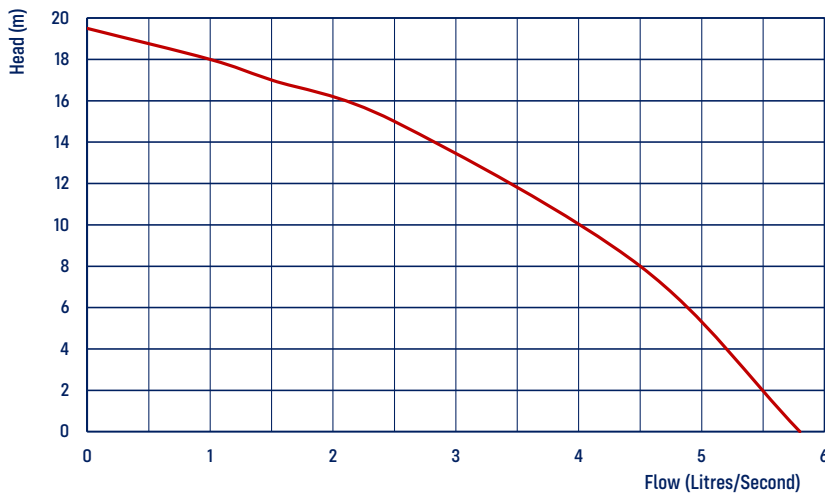

CODE	MODEL	OPERATION	POWER 240V			MAXIMUM		CABLE LENGTH (M)	OUTLET		WEIGHT (KG)	SIZE L x W x H (MM)
			AMPS	P1 (kW)	P2 (kW)	FLOW (L/SEC)	HEAD (M)		MM	IN		
17937	REG015	Auto	9.5	2.0	1.5	5.8	19.5	10	50	2"	25	260x180x490