

## VARIABLE SPEED MULTISTAGE PUMP

### VSRE SERIES



The REEFE® VSRE series are designed with advanced technologies for super-efficient flow of clean water in various applications. Available in an extensive range of sizes, these market leading pumps are built to meet varying demands and requirements. European quality, VSRE pumps feature a highly durable construction to guarantee extended service life. Assembled with a variable speed drive, the pump can respond to demands in application, guaranteeing perfect pressure.

#### APPLICATIONS

- Wholehouse supply
- Amenities blocks, hotels, restaurants
- Irrigation Supply
- Mains Pressure Boosting
- Stock Watering Systems


#### FEATURES & BENEFITS

- Highly efficient, energy saving design
- Heavy duty, durable construction for extended service life
- Externally ventilated motor for superior heat control
- Automatic re-start after loss of prime event
- Tested to AS4020 for potable water
- IP44 Protection Rating | Class F Insulation

#### CONSTRUCTION

- Stainless Steel AISI304 pump body and impeller
- Stainless Steel AISI416 shaft
- Carbon-graphite mechanical seal
- Noryl/fiberglass impellers & diffusor
- Thermal overload protection
- Quick plug Connection
- 2L or 4L European Made pressure tank supplied depending on pump model

PRESSURE PUMPS

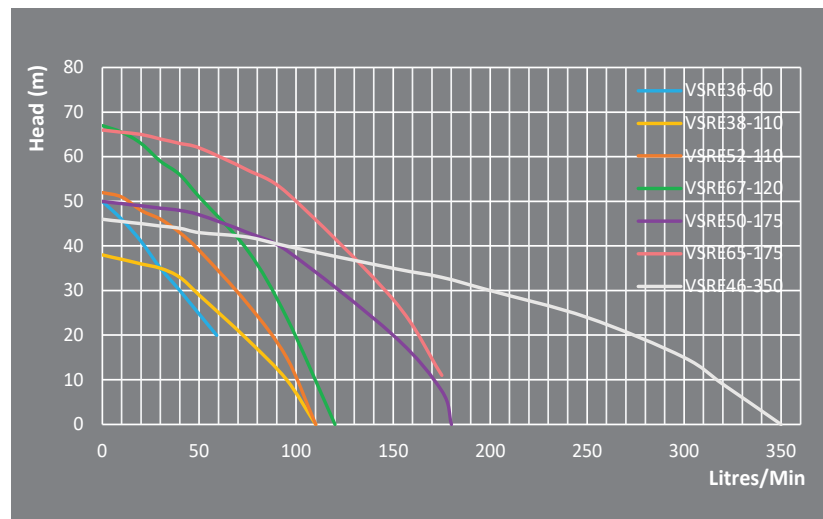

CODE	MODEL	POWER 240V		RATED		MAXIMUM		NO. OF TAPS	CABLE LENGTH (M)	INLET (IN)	OUTLET (IN)	WEIGHT (KG)	SIZE L X W X H (MM)
		KW	AMPS	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)						
21620	VSRE36-60	0.6	3.5	30	35	50	40	2-4	1.5	1"	1"	6	357x126x340
21637	VSRE38-110	0.75	4.2	55	27	110	38	4-6	1.5	1"	1"	9.3	353x155x359
21644	VSRE52-110	0.8	5.4	55	37	110	52	5-8	1.5	1"	1"	9.8	372x155x359
21651	VSRE67-120	1.2	7.2	60	47	120	67	6-10	1.5	1"	1"	10.5	390x155x359
21668	VSRE50-175	1.1	9	88	41	175	50	8-14	1.5	1 1/4"	1 1/4"	12.7	436x191x392
21675	VSRE65-175	1.5	11.8	88	55	175	66	10-16	1.5	1 1/4"	1 1/4"	14.4	460x191x392
21682	VSRE46-350	2.2	12	175	33	350	46	15-20	1.5	2"	1 1/2"	16.5	500x193x392