



STORMWATER PUMP PIT

RSWP SERIES

Light duty Polyethylene stormwater pit is ideal for backyards & controlled stormwater collection. These systems are recommended to be installed in Domestic and Residential applications only.

APPLICATIONS

- Pumping stormwater
- Stormwater collection and discharge in low lying backyard areas
- Building sites and other temporary applications


FEATURES & BENEFITS

- Compact design for easy installation
- Preassembled - ready to install
- Can handle up to 40°C
- Up to 30mm solids handling (Refer to pump model details on specific sizing)
- Not suitable for raw sewage

CONSTRUCTION

- 300 Pit = 40L
- 450 Pit = 85L
- 600 Pit = 180L
- Class A Galvanised steel grate
- Inlet to be installed on site
- 1 ½" or 2" MBSP inlet/outlet

PIT SIZE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
300sq	360	360	450
450sq	560	560	505
600sq	715	715	660

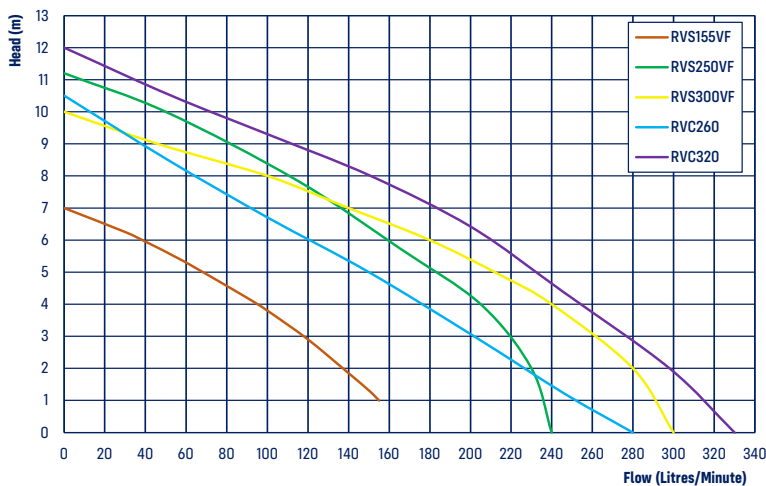

CODE	PUMP MODEL	PIT SIZE	DESCRIPTION	OUTLET SIZE
22887	RVS155VF	300	RSWP160-300	1 ½" 40mm
22894	RVS155VF	450	RSWP160-450	1 ½" 40mm
22900	RVS155VF	600	RSWP160-600	1 ½" 40mm
22917	RVS250VF	300	RSWP230-300	1 ½" 40mm
22924	RVS250VF	450	RSWP230-450	1 ½" 40mm
22931	RVS250VF	600	RSWP230-600	1 ½" 40mm
22979	RVS300VF	300	RSWP300-300	1 ½" 40mm
22986	RVS300VF	450	RSWP300-450	1 ½" 40mm
22993	RVS300VF	600	RSWP300-600	1 ½" 40mm
22955	RVC260	450	RSWP260-450	1 ½" 40mm
22962	RVC260	600	RSWP260-600	1 ½" 40mm
23006	RVC320	450	RSWP320-450	2" 50mm
23013	RVC320	600	RSWP320-600	2" 50mm

