



STORMWATER PUMP PIT

QSWP MINI SERIES

Light duty polyethylene stormwater pits are ideal for backyards & controlled stormwater collection. These systems are recommended to be installed in domestic and residential applications only.

APPLICATIONS


- Pumping stormwater
- Stormwater collection and discharge in low lying backyard areas
- Building sites and other temporary applications

FEATURES & BENEFITS

- Compact design for easy installation
- Preassembled - ready to install
- Can handle up to 40°C
- Up to 30mm solids handling (Refer to pump model details on specific sizing)
- Not suitable for raw sewage

CONSTRUCTION

- 300 Pit = 40L
- 450 Pit = 85L
- 600 Pit = 180L
- Class A Galvanised steel grate
- Inlet to be installed on site
- 1 ½" | 40mm MBSP outlet excluding RVS155VF Pump Pits.
- RVS155VF: 1 ¼" | 32mm MBSP supplied with 32-40mm poly bush
- Assembled using submersible pumps

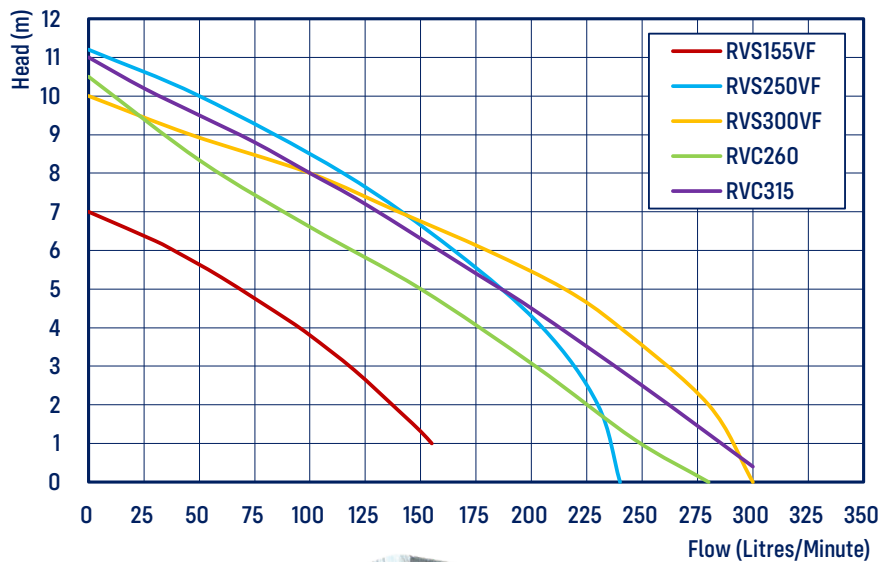

MINI 3 SERIES with GRATE - 300sq STORMWATER PITS

CODE	MODEL	PUMP MODEL	OUTLET SIZE	SIZE L X W X H (MM)	CAPACITY
22887	QSWP160-300	RVS155VF	1 ¼" 32mm	360 x 360 x 450	40L
22917	QSWP230-300	RVS250VF	1 ½" 40mm	360 x 360 x 450	40L



MINI 4 SERIES with GRATE - 450sq STORMWATER PITS

CODE	MODEL	PUMP MODEL	OUTLET SIZE	SIZE L X W X H (MM)	CAPACITY
22894	QSWP160-450	RVS155VF	1 ¼" 32mm	560 x 560 x 505	85L
22924	QSWP230-450	RVS250VF	1 ½" 40mm	560 x 560 x 505	85L
22986	QSWP300-450	RVS300VF	1 ½" 40mm	560 x 560 x 505	85L
22955	QSWP260-450	RVC260	1 ½" 40mm	560 x 560 x 505	85L
23006	QSWP320-450	RVC315	1 ½" 40mm	560 x 560 x 505	85L



MINI 6 SERIES with GRATE - 600sq STORMWATER PIT

CODE	MODEL	PUMP MODEL	OUTLET SIZE	SIZE L X W X H (MM)	CAPACITY
22900	QSWP160-600	RVS155VF	1 ¼" 32mm	715 x 715 x 660	180L
22931	QSWP230-600	RVS250VF	1 ½" 40mm	715 x 715 x 660	180L
22993	QSWP300-600	RVS300VF	1 ½" 40mm	715 x 715 x 660	180L
22962	QSWP260-600	RVC260	1 ½" 40mm	715 x 715 x 660	180L
23013	QSWP320-600	RVC315	1 ½" 40mm	715 x 715 x 660	180L

