



STORMWATER PUMP PIT

RSWP SERIES

Light duty Polyethylene stormwater pit is ideal for backyards & controlled stormwater collection. These systems are recommended to be installed in Domestic and Residential applications only.

APPLICATIONS

- Pumping Stormwater
- Stormwater collection and discharge in low lying backyard areas
- Building sites and other temporary applications


FEATURES & BENEFITS

- Compact design for easy installation
- Preassembled - ready to install
- Can handle up to 40°C
- Up to 30mm solids handling (Refer to pump model details on specific sizing)
- Not suitable for raw sewage

CONSTRUCTION

- 300 Pit = 40L
- 450 Pit = 85L
- 600 Pit = 180L
- Class A Class A Galvanised steel grate
- Inlet to be installed on site
- 1 1/2" or 2" MBSP inlet/outlet

PIT SIZE	LENGTH	WIDTH	HEIGHT
300sq	360	360	450
450sq	560	560	505
600sq	715	715	660

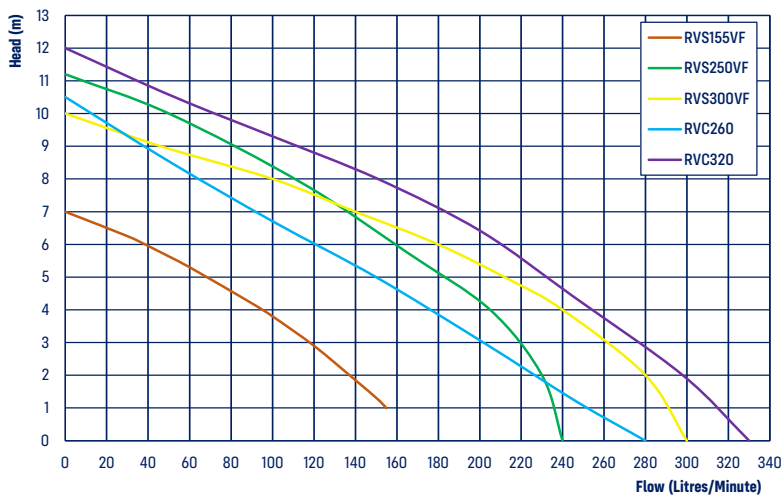

CODE	PUMP MODEL	PIT SIZE	DESCRIPTION	OUTLET SIZE
22887	RVS155VF	300	RSWP160-300	1 1/2" 40mm
22894	RVS155VF	450	RSWP160-450	1 1/2" 40mm
22900	RVS155VF	600	RSWP160-600	1 1/2" 40mm
22917	RVS250VF	300	RSWP230-300	1 1/2" 40mm
22924	RVS250VF	450	RSWP230-450	1 1/2" 40mm
22931	RVS250VF	600	RSWP230-600	1 1/2" 40mm
22979	RVS300VF	300	RSWP300-300	1 1/2" 40mm
22986	RVS300VF	450	RSWP300-450	1 1/2" 40mm
22993	RVS300VF	600	RSWP300-600	1 1/2" 40mm
22955	RVC260	450	RSWP260-450	1 1/2" 40mm
22962	RVC260	600	RSWP260-600	1 1/2" 40mm
23006	RVC320	450	RSWP320-450	2" 50mm
23013	RVC320	600	RSWP320-600	2" 50mm



PACKAGED PUMP STATIONS