



POLY PUMP 2" 3"

RP POLY SERIES

These premium grade Honda powered pumps are fitted with a poly wet-end, noryl impeller and viton seals to suit pumping of agricultural chemicals and some other mildly corrosive liquids. Always check suitability of the liquid with seal types before proceeding. Engine covered by a 3 year manufacturer's warranty, 2 year warranty on the wet-end.

APPLICATIONS

- Salt water
- Wastewater
- Liquid fertilisers ¹
- Milk ²
- Some milk acids

FEATURES & BENEFITS

- Genuine HONDA engine - backed by Honda 3 year universal warranty
- Corrosion resistant wet-end
- 2 year warranty on wet-end
- Rubber mounts
- Engine with oil sensor

CONSTRUCTION

- Noryl impeller and volute
- Viton mechanical seal, check valve & o-rings
- Carry handle



ENGINE DRIVEN

SUCTION LIFT INFO - 2" POLY

Suction Head (m)	Max Flow (L/Min)
0	725
-1.5	707
-3	686
-4.5	660
-6	575

SUCTION LIFT INFO - 3" POLY

Suction Head (m)	Max Flow (L/Min)
0	735.13
-1.5	735.06
-3	734.98
-4.5	698.11
-6	369.86

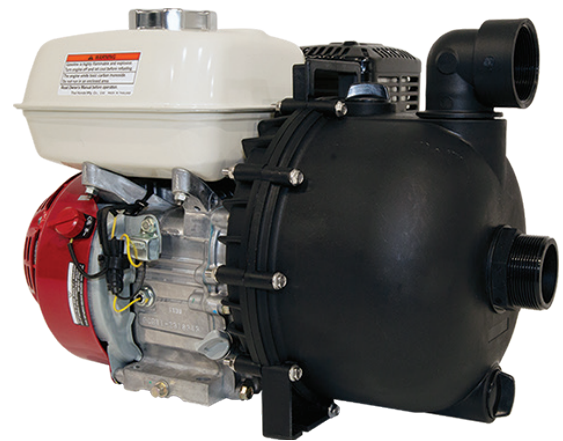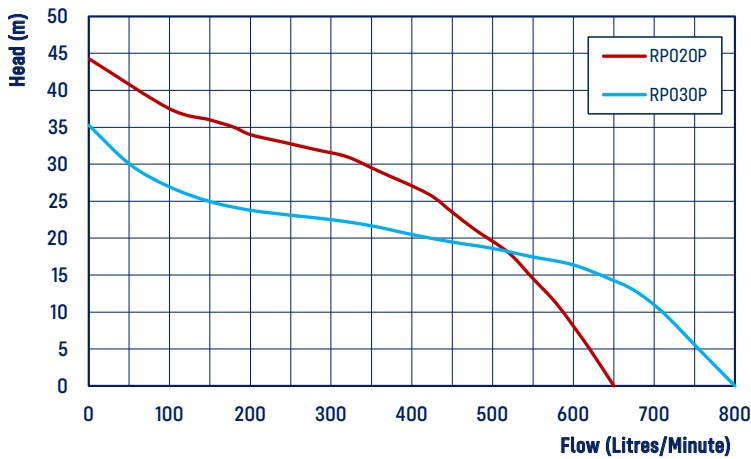

NOTE

1. Check suitability with seal types before proceeding.
2. Not food grade.
3. Not suitable for undiluted molasses.
4. Suitable for some diluted molasses mixtures.
5. Note lower temperatures will increase the viscosity of the mixture and can damage the pump and engine.

CODE	PUMP MODEL	ENGINE HONDA	START	CARRY HANDLE	FUEL TANK	SUCTION SIZE	DISCHARGE SIZE	MAX HEAD (M)	MAX FLOW RATE (L/MIN)	PUMP BODY	HORSE POWER CLASS	WEIGHT (KG)
20050	RP020P	GX200	Recoil	Yes	3.1L	2"	2"	44	650	Poly	5.5	26
20067	RP030P	GX200	Recoil	Yes	3.1L	3"	3"	35	800	Poly	5.5	27