

SHALLOW WELL JET PUMP W PRESSURE TANK & DIGITAL SWITCH

RSWE SERIES



The REEFE self-priming jet pump has been specifically constructed for high demands of suction lift. Suitable for the supply of water to house and garden, stock watering troughs. 100% European made, guaranteeing superior quality and longer service life.

APPLICATIONS


- Clean water transfer
- Surface mounted shallow wells
- Spear point wells
- Garden sprinklers and irrigation
- Stock watering

FEATURES & BENEFITS

- Continuous rated motors to ensure long service life.
- Available in various combinations:
 - Pump only
 - Automatic Pressure Controller (PC)
 - Pressure Switch with Tank and Gauge (PTS)

CONSTRUCTION

- Cast Iron motor bracket and pump body
- Venturi in Noryl
- Grade 416 stainless steel shaft
- Built-in thermal overload protection
- Ceramic / Graphite mechanical seal
- Supplied with 18L Pressure Tank, EPS1 Pressure Switch & outlet
- 18L pressure tank with heavy duty butyl diaphragm and stainless threaded inlet

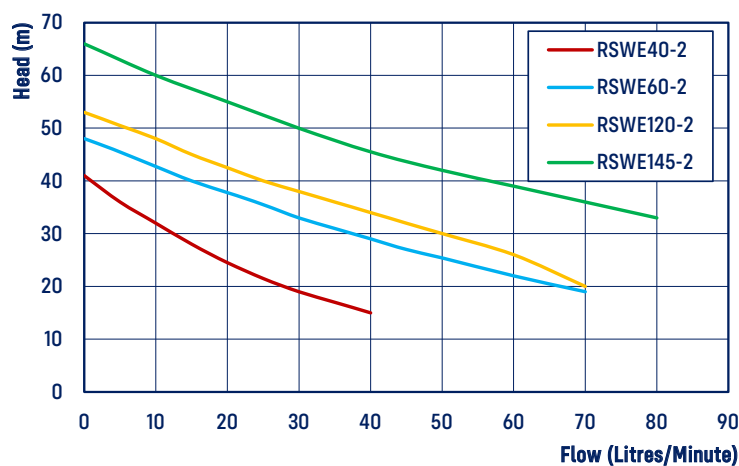

| CODE | MODEL | POWER 240V | | | RATED | | MAXIMUM | | INLET | | OUTLET | | WEIGHT (KG) | SIZE L X W X H (MM) |
|-------|---------------|------------|------|---------|--------------|----------|--------------|----------|-------|-----|--------|----|-------------|---------------------|
| | | AMPS | µF | P2 (kW) | FLOW (L/MIN) | HEAD (M) | FLOW (L/MIN) | HEAD (M) | MM | IN | MM | IN | | |
| 32527 | RSWE40-2.PTS | 3.5 | 12.5 | 0.45 | 30 | 19.5 | 40 | 41 | 25 | 1" | 25 | 1" | 18.55 | 405x185x640 |
| 32534 | RSWE60-2.PTS | 4.8 | 20 | 0.75 | 30 | 34 | 70 | 45 | 25 | 1" | 25 | 1" | 19.25 | 430x185x640 |
| 32541 | RSWE120-2.PTS | 5.2 | 20 | 0.88 | 30 | 38 | 70 | 50 | 25 | 1" | 25 | 1" | 21.5 | 430x185x640 |
| 32558 | RSWE145-2.PTS | 8.6 | 31.5 | 1.1 | 30 | 50 | 80 | 66 | 40 | 1½" | 25 | 1" | 28.15 | 510x210x611 |