

UNDERSINK PUMP SYSTEMS

RUP SERIES

Ideal for confined spaces, such as under benches, under sinks and in cupboards. Perfect for transferring waste water to separators, or for lifting water from basements to street level waste connections. Can even be used on mobile camper trailers and temporary job site buildings for connection into a common waste system.

APPLICATIONS


- Pumping grey water
- Undersink pump well units
- Camper trailers and other mobile waste systems
- Building sites and other temporary waste systems
- Wastewater removal

FEATURES & BENEFITS

- Compact & easy to install
- Preassembled - ready to install
- Thermal overload
- Can handle up to 58°C
- 15mm solids handling
- Quality robust pump - RVS155VF
- 24 hour auto pump timer (RUP155-T only)
- Not suitable for raw sewage

CONSTRUCTION

- 45L polyethylene tank
- 2" FBSP inlets and overflow
- 1" MBSP outlet
- RVS155-VF or RVS200-VF pump

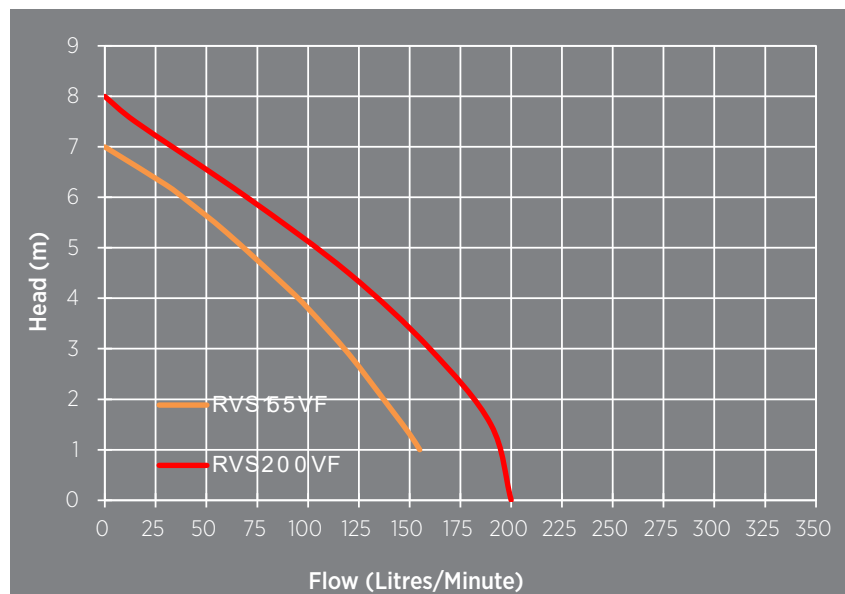

CODE	MODEL	POWER 240V		MAXIMUM		SOLID HANDLING	CABLE LENGTH	NOMINAL CAPACITY	INLET (FBSP)	OUTLET (MBSP)	OVERFLOW (FBSP)	SIZE L X W X H (MM)
		AMPS	WATTS	FLOW (L/MIN)	HEAD (M)							
11911	RUP155	2	180	155	7.0	15mm	10m	45L	2"	1"	2"	460 x 260 x 380
11997	RUP155-T	2	180	155	7.0	15mm	10m	45L	2"	1"	2"	460 x 260 x 435
13519	RUP200	2	250	200	8	25mm	10m	45L	2"	1"	2"	460 x 260 x 380
12208	RUP200-T	2	250	200	8	25mm	10m	45L	2"	1"	2"	460 x 260 x 435