

JET PRESSURE PUMP W PRESSURE TANK & DIGITAL SWITCH

PRJ-E SERIES



The PRJ European Series of pressure pumps are of superior quality construction and efficiency giving real power savings to the owner. They are suitable for the supply of water to the house and garden. Quiet running and reliable, ideal for suburban areas. Suitable for Drinking Water - certified to AS/NZS4020 for use with potable water.

APPLICATIONS


- Domestic water supply
- Garden irrigation
- Clean water transfer
- Water storage tank pump set

FEATURES & BENEFITS

- High suction lift capability - up to 6m
- Certified to AS/NZS4020 for use with potable water
- Superior Carbon Ceramic Mechanical Seal for durability
- Average Decibel Rating (PRJ55E, PRJ65E: 70dB; PRJ80E: 80dB; PRJ100E: 90dB)
- Max Water Temperature - 50°C
- Max Ambient Temperature - 40°C
- Fitted with digital pressure switch for easy installation and adjustment

CONSTRUCTION

- Technopolymer diffuser, jet & venturi & impeller
- Brass barrel union for high corrosion resistance and longevity
- Stainless Steel 304 Pump Body & Shaft for superior corrosion resistance
- Carbon Ceramic mechanical seals for reliability
- 5 way brass tee with combo check valve
- Supplied with a EPS1 Pressure Switch
- Oil Filled Pressure Gauge
- PRJ55E.PTS supplied with 8L Tank
- PRJ65E.PTS, PRJ80E.PTS and PRJ100E.PTS supplied with 18L Tank
- Ingress Protection IP44
- Insulation Class F

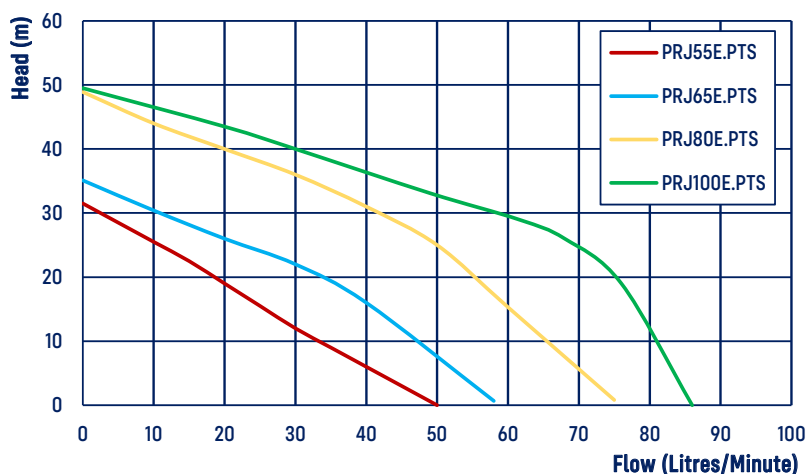

CODE	MODEL	POWER 240V			RATED		MAXIMUM		SUCTION LIFT (M)	NO. OF TAPS	AVG. DECIBEL RATING	INLET OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
		AMPS	P1 (kW)	P2 (kW)	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)				MM	IN		
23891	PRJ55E.PTS	2.2	0.51	0.37	20	15.8	52	31.5	6	2-4	70dB	25	1"	10.9	320x160x700
23907	PRJ65E.PTS	2.7	0.60	0.44	27.5	23	58	35	6	4-6	70dB	25	1"	12.2	380x280x700
23914	PRJ80E.PTS	4.5	0.99	0.74	31	24	75	48	6	5-8	80dB	25	1"	14.7	400x280x730
23921	PRJ100E.PTS	5.2	1.11	0.88	43	35	86	50	6	7-12	90dB	25	1"	16.2	420x280x730