

FIREFIGHTING PUMP HIGH PRESSURE

RP 2" HIGH PRESSURE



These Premium grade Honda powered pumps are engineered with quality materials to produce an exceptionally reliable pump. Available in Recoil and Electric start, they are a very versatile pump for many applications pumping clean water.

APPLICATIONS

- Water harvesting
- Drainage
- Greywater drainage
- Water truck filling

FEATURES & BENEFITS

- Genuine GX200 HONDA engine - backed by Honda 3 year universal warranty
- 3 year warranty on wet-end and roll frame
- Self-priming to 6 metres with foot valve
- GX200 available with or without roll frame
- 2" BSP threaded fittings
- Wiring harness available as option for battery connection


NOTE: Battery and leads not included with Electric Start option
Use a 12 Volt battery with an ampere -hour rating of at least 18Ah

CONSTRUCTION

- Cast iron single impeller and volute
- Recoil - 3/4" threaded shaft
- Electric - 5/8" threaded shaft

SUCTION LIFT INFO

Suction Head (m)	Max Flow (L/Min)
0	491
-1.5	480
-3	467
-4.5	439
-6	350

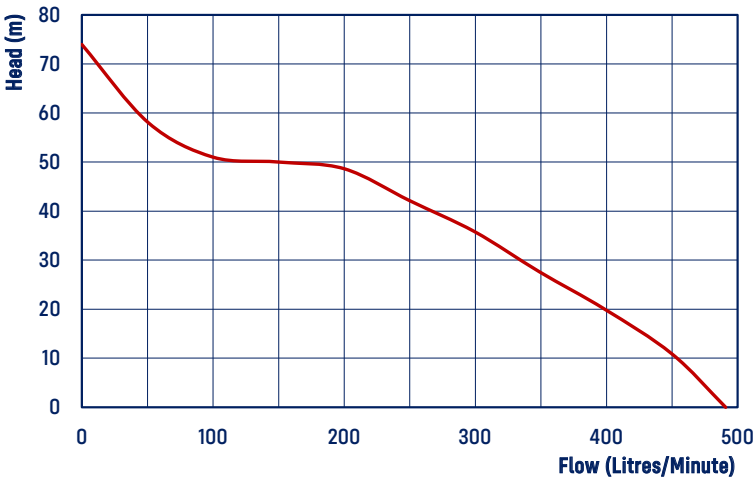

CODE	MODEL	ENGINE HONDA	START	FUEL TANK	SUCTION SIZE	DISCHARGE SIZE	MAX HEAD (M)	MAX FLOW RATE (L/MIN)	PUMP BODY	HORSE POWER CLASS	WEIGHT (KG)
22498	RP020H	GX200	Recoil	3.1L	2"	2"	74	490	Alloy	6.5	25
22504	RP020H-RF	GX200	Recoil	3.1L	2"	2"	74	490	Alloy	6.5	29
22511	RP020HE	GX200	Electric	3.1L	2"	2"	74	490	Alloy	6.5	28
22528	RP020HE-RF	GX200	Electric	3.1L	2"	2"	74	490	Alloy	6.5	32