

# SINGLE IMPELLER FIRE FIGHTING PUMP

## RP SINGLE IMPELLER SERIES

These Premium grade Honda powered pumps are engineered with quality materials to produce an exceptionally reliable pump.

Available in Recoil and Electric start, they are a very versatile pump for many applications pumping clean water.



### APPLICATIONS


- Fire-fighting
- Boom spraying
- Wash-down applications
- Water transfer

### FEATURES & BENEFITS

- Genuine GP160 HONDA engine - backed by Honda 1 year universal warranty
- Genuine GX200 HONDA engine - backed by Honda 3 year universal warranty
- Self-priming 6 metres, with foot valve
- Engine with oil sensor
- Available with or without roll frame
- Wiring harness available as an option for battery connection
- 2 year warranty on wet-end and roll frame
- Suitable for pumping clean fresh water only

### CONSTRUCTION

- Alloy closed vein impeller and volute
- Heavy duty cast inlets and outlets
- 3/4" threaded shaft
- Hose tails, hose clips & suction strainer included

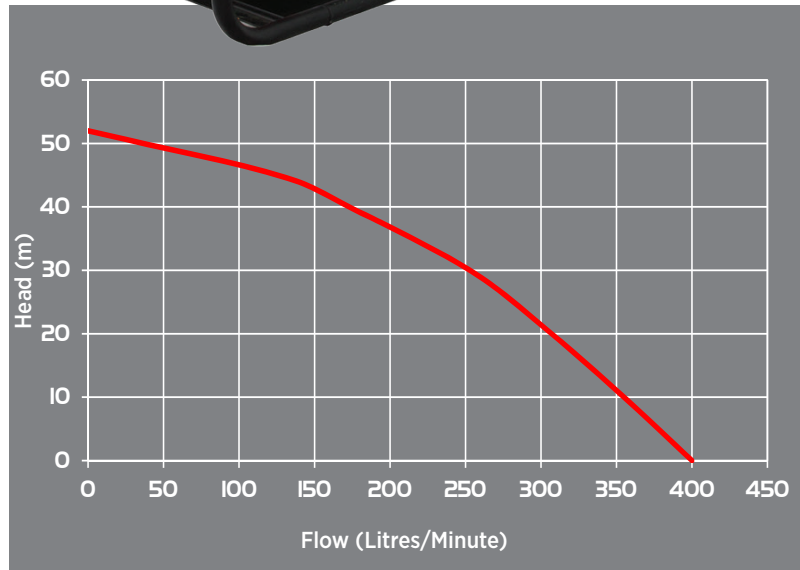

CODE	MODEL	ENGINE	FUEL TANK	SUCTION SIZE	DISCHARGE SIZE	MAX HEAD (M)	MAX FLOW RATE (L/MIN)	PUMP BODY	HORSE POWER CLASS	WEIGHT (KG)
17807	GP015R	Honda GP160, Recoil Start	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	5.5	26
17814	GP015R-RF	Honda GP160, Recoil Start w Roll Frame	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	5.5	30
8447	RP015R	Honda GX200, Recoil Start	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	6.5	26
6641	RP015R-RF	Honda GX200, Recoil Start w Roll Frame	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	6.5	30
8591	RP015E	Honda GX200E, Electric Start	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	6.5	26
6719	RP015E-RF	Honda GX200E, Electric Start w Roll Frame	3.1L	1.5"	1x1.5"/2x1"	52	400	Alloy	6.5	30