

VORTEX SUMP PUMP w/ VERTICAL FLOAT

RVS-VF SERIES

The REEFE® vortex vertical float pump, is the same great quality and performance as the standard RVS range, but with the advantage of the vertical float which make them more versatile than ever.



APPLICATIONS


- Wastewater treatment system
- Confined spaces
- Small or shallow pits / sumps
- Narrow irrigation chambers

FEATURES & BENEFITS

- Low power consumption
- Thermal overload protection
- Soft solids handling 15mm (155), 25mm(200), 30mm(300)
- High performance
- H05RNF 10m power cable
- Includes hosetail
- Maximum liquid temperature 40°C
- Adjustable “stop” vertical float switch

CONSTRUCTION

- Stainless steel motor housing & shaft
- Cast iron vortex impeller (RVS155VF - technopolymer impeller)
- Dual mechanical seal in oil chamber
- Motor insulation Class F on 200 & 300. Class B on the RVS155-VF
- Cast iron base and outlet

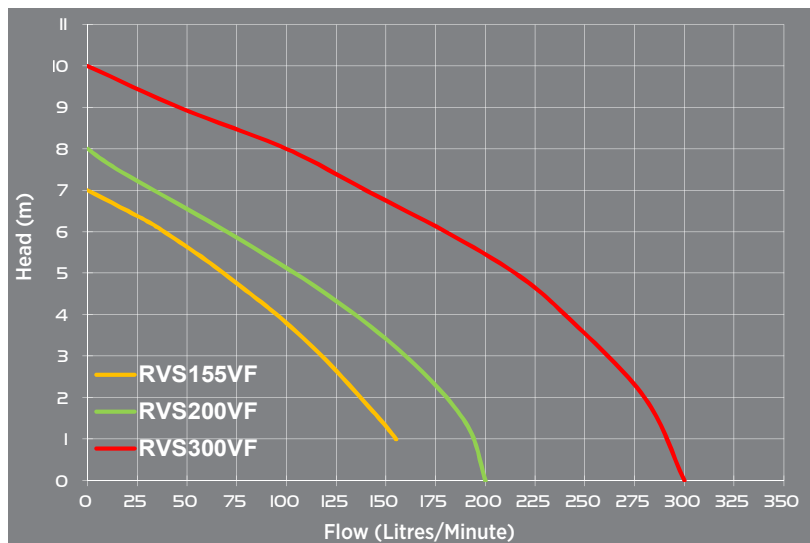

CODE	MODEL	POWER 240V		RATED		MAXIMUM		SOFT SOLIDS HANDLING	CABLE LENGTH	OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
		AMPS	WATTS	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)			MM	INCH		
8416	RVS155VF	1.5	180	90	4.0	155	7	15mm	10m	32	1 1/4	8.5	220 x 190 x 350
8225	RVS200VF	2.0	250	130	4.0	200	8	25mm	10m	40	1 1/2	9	190 x 205 x 350
8256	RVS300VF	4.0	400	220	5.0	300	10	30mm	10m	50	2	13	220 x 225 x 390