

DC POWERED SUMP PUMP 12V & 24V





APPLICATIONS


- Stormwater pits
- General dewatering •
- Clean water transfer
- Off grid applications

FEATURES & BENEFITS

- Low power consumption
- Compact design •
- Includes hosetail •
- Efficient motor
- Not for salt water
- 2mm solids handling
- 5m cable with battery clips
- For short cycle pumping, do not use for longterm operation. Max duty cycle is 20 minutes

CONSTRUCTION

- Stainless steel motor housing & shaft
- Dual lip seal •
- Depth adustable float switch •
- Extremely reliable construction
- High strength plastic casing, body, • impeller and base
- Ingress Protection IP68 •

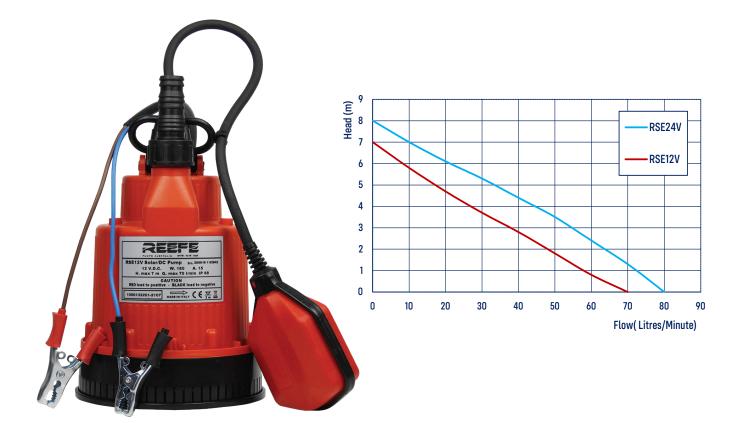

CODE	MODEL	POWER			RATED		MAXIMUM		SOLIDS	CABLE	OUTLET		WEIGHT	SIZE
		VOLTS	AMPS	P1 (kW)	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)	HANDLING (MM)	LENGTH (M)	ММ	IN	(KG)	L X W (MM)
21019	RSE12V	12	15	0.18	35	3.2	70	7	2	5	25	1"	3.6	282x164
21026	RSE24V	24	8.5	0.22	40	4.5	80	8	2	5	25	1"	3.6	280X164

P 1800 807 604

E sales@ascento.com.au