



HIGH FLOW VORTEX SUMP PUMP

RVS SERIES

VORTEX & HIGH HEAD SUMP

The REEFE premium vortex sump pump is specifically designed for the most demanding jobs with industrial grade motor insulation and cast iron impellers. Every pump is factory tested for quality assurance and is ultra-reliable. High quality guaranteed.

APPLICATIONS


- Greywater pits
- Wastewater applications
- Wastewater treatment systems
- Sullage pumping, stormwater
- Pool & tank emptying

FEATURES & BENEFITS

- Cast iron vortex impeller for durability
- Thermal overload protection
- High performance
- 10m power cable H07RN-F
- Includes hoesetail
- Max liquid temperature 40°C
- Electrical Safety Approval to AS/NZS 60335.2.41

CONSTRUCTION

- Stainless steel motor housing & shaft
- Cast iron vortex impeller
- Dual mechanical seal in oil chamber
- Cast iron base and outlet
- Depth adjustable MAC 3 float switch on auto models
- Extremely reliable construction
- Ingress Protection IP68
- Insulation Class F

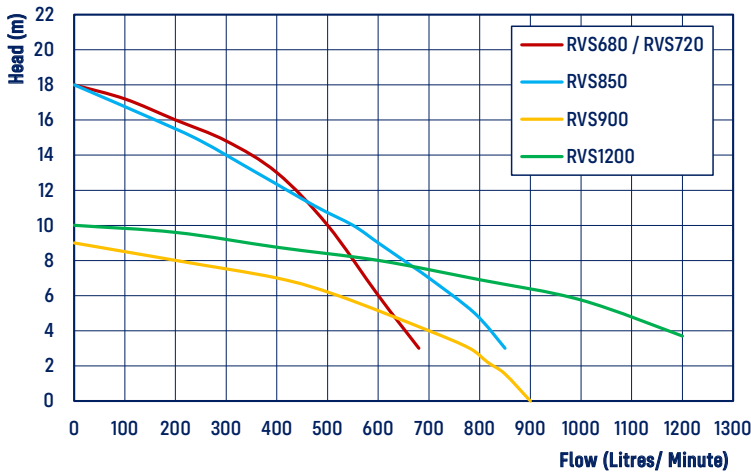

CODE	MODEL	OPERATION	POWER				RATED		MAXIMUM		SOFT SOLIDS HANDLING (MM)	CABLE LENGTH (M)	OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
			VOLTS	AMPS	P1 (kW)	P2 (kW)	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)			MM	IN		
24874	RVS680A	Auto	240	9.2	2.0	1.5	400	13.0	680	18	35	10	80	3"	30	497x221x607
19214	RVS720M-3	Manual	415	3.1	2.0	1.5	400	13.0	680	18	35	10	80	3"	38	497x221x607
19191	RVS850M-3	Manual	415	4.3	2.8	2.2	400	12.0	850	18	50	10	80	3"	39	544x242x647
13793	RVS900A	Auto	240	9.8	2.0	1.5	600	5.0	900	9.0	65	10	80	3"	38	497x221x607
13809	RVS900M-3	Manual	415	3.4	2.0	1.5	600	5.0	900	9.0	65	10	80	3"	38	497x221x607
13816	RVS1200M-3	Manual	415	4.7	2.8	2.2	600	8.0	1200	10	65	10	80	3"	39	544x242x647