

## FIREFIGHTING PUMP HIGH PRESSURE

### RP 2" HIGH PRESSURE



These Premium grade Honda powered pumps are engineered with quality materials to produce an exceptionally reliable pump. Available in Recoil and Electric start, they are a very versatile pump for many applications pumping clean water.

#### APPLICATIONS

- Water harvesting
- Drainage
- Greywater drainage
- Water truck filling

#### FEATURES & BENEFITS

- Genuine GX200 HONDA engine - backed by Honda 3 year universal warranty
- 3 year warranty on wet-end and roll frame
- Self-priming to 6 metres with foot valve
- GX200 available with or without roll frame
- 2" BSP threaded fittings
- Wiring harness available as option for battery connection
- Suitable for fresh water only


NOTE: battery and leads not included with Electric Start option

#### CONSTRUCTION

- Cast iron single impeller and volute
- Recoil - 3/4" threaded shaft
- Electric - 5/8" threaded shaft

#### SUCTION LIFT INFO

Suction Head (m)	Max Flow (L/Min)
0	491
-1.5	480
-3	467
-4.5	439
-6	350

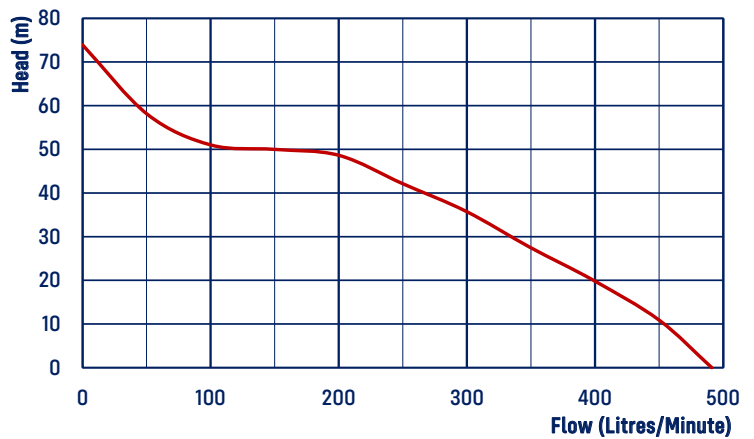

CODE	MODEL	ENGINE HONDA	START	FUEL TANK	SUCTION SIZE	DISCHARGE SIZE	MAX HEAD (M)	MAX FLOW RATE (L/MIN)	PUMP BODY	HORSE POWER CLASS	WEIGHT (KG)
22498	RP020H	GX200	Recoil	3.1L	2"	2"	74	490	Alloy	6.5	25
22504	RP020H-RF	GX200	Recoil	3.1L	2"	2"	74	490	Alloy	6.5	29
22511	RP020HE	GX200	Electric	3.1L	2"	2"	74	490	Alloy	6.5	28
22528	RP020HE-RF	GX200	Electric	3.1L	2"	2"	74	490	Alloy	6.5	32