



FIREFIGHTING PUMP SINGLE IMPELLER

RPP SERIES

These Premium grade Honda powered pumps are engineered with quality materials to produce an exceptionally reliable pump. Available in Recoil and Electric start, they are a very versatile pump for many applications pumping clean water.

APPLICATIONS

- Fire-fighting
- Boom spraying
- Wash-down applications
- Water transfer

FEATURES & BENEFITS

- Genuine GX200 HONDA engine - backed by Honda 3 year universal warranty
 - 3 year warranty on wet-end and roll frame
 - Self-priming 6 metres, with foot valve
 - Engine with oil sensor
 - Available with or without roll frame
 - Wiring harness available as an option for battery connection
- NOTE: Battery and leads not included with Electric Start option


CONSTRUCTION

- Alloy closed vane impeller and volute
- Heavy duty cast inlets and outlets
- Recoil - 3/4" threaded shaft
- Electric - 5/8" threaded shaft

ENGINE DRIVEN

SUCTION LIFT INFO

Suction Head (m)	Max Flow (L/Min)
0	377
-1.5	354
-3	320
-4.5	274
-6	227

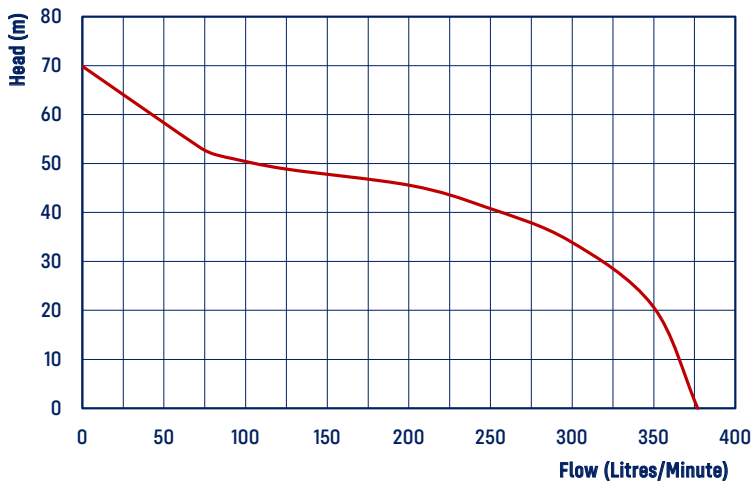

CODE	MODEL	ENGINE HONDA	START	ROLL FRAME	FUEL TANK	SUCTION SIZE	DISCHARGE SIZE	MAX HEAD (M)	MAX FLOW RATE (L/MIN)	PUMP BODY	HORSE POWER CLASS	WEIGHT (KG)
23174	RPP15R	GX200	Recoil	-	3.1L	2"	1x1.5"/2x1"	70	380	Alloy	6.5	27
23181	RPP15R-RF	GX200	Recoil	YES	3.1L	2"	1x1.5"/2x1"	70	380	Alloy	6.5	31
23198	RPP15E	GX200	Electric	-	3.1L	2"	1x1.5"/2x1"	70	380	Alloy	6.5	27
23204	RPP15E-RF	GX200	Electric	YES	3.1L	2"	1x1.5"/2x1"	70	380	Alloy	6.5	31