

FIREFIGHTING PUMP TWIN IMPELLER

RPP TWIN IMPELLER SERIES



These Premium grade Honda powered pumps are engineered with quality materials to produce a proven reliable pump. Boasting exceptionally heavy duty construction, these pumps are guaranteed to deliver well in tough environments.

APPLICATIONS

- Fire-fighting
- Boom spraying
- Wash-down applications
- Water transfer

FEATURES & BENEFITS


- Genuine GX200 HONDA engine - backed by Honda 3 year universal warranty
- 3 year warranty on wet-end and roll frame
- Self-priming to 6 metres with foot valve
- Engine with oil sensor
- Available with or without roll frame
- Wiring harness available as an option for battery connection
- Suitable for pumping clean fresh water only

NOTE: Battery and leads not included with Electric Start option

CONSTRUCTION

- Alloy twin impeller and diffuser
- Heavy duty cast inlets and outlets
- Recoil - 3/4" threaded shaft
- Electric - 5/8" threaded shaft

ENGINE DRIVEN

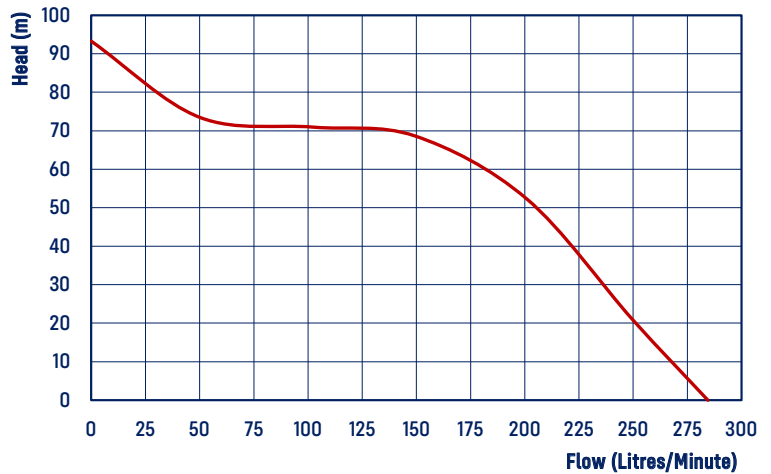

CODE	MODEL	ENGINE HONDA	START	FUEL TANK	SUCTION SIZE	DISCHARGE SIZE	MAX HEAD (M)	MAX FLOW RATE (L/MIN)	PUMP BODY	HORSE POWER CLASS	WEIGHT (KG)
23211	RPP15TR	GX200	Recoil	3.1L	1.5"	1x1.5"/2x1"	92	280	Alloy	6.5	28
23228	RPP15TR-RF	GX200	Recoil	3.1L	1.5"	1x1.5"/2x1"	92	280	Alloy	6.5	32
23235	RPP15TE	GX200	Electric	3.1L	1.5"	1x1.5"/2x1"	92	280	Alloy	6.5	28
23242	RPP15TE-RF	GX200	Electric	3.1L	1.5"	1x1.5"/2x1"	92	280	Alloy	6.5	32