



SHALLOW WELL JET PUMP

RSWE SERIES

The REEFE self-priming jet pump has been specifically constructed for high demands of suction lift. Suitable for the supply of water to house and garden, stock watering troughs. 100% European made, guaranteeing superior quality and longer service life.

APPLICATIONS

- Clean water transfer
- Surface mounted shallow wells
- Spear point wells
- Garden sprinklers and irrigation
- · Stock watering

FEATURES & BENEFITS


- Continuous rated motors to ensure long service
- Available in various combinations:
 - Pump only
 - Automatic Pressure Controller (PC)
 - Pressure Switch with Tank and Gauge (PTS)

CONSTRUCTION

- · Cast Iron motor bracket and pump
- · Venturi in Noryl
- Grade 416 stainless steel shaft
- Built-in thermal overload protection
- Ceramic / Graphite mechanical seal
- Noryl impellers on RSWE40-2, RSWE60-2, RSWE120-2.
- Brass Impeller on RSWE145-2



RSWE | PUMP ONLY

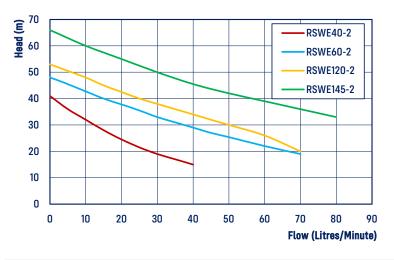



RSWE | PC

CODE	MODEL	PRESSURE CONTROLLER	POWER 240V			RATED		MAXIMUM		INLET		OUTLET		WEIGHT	SIZE
			AMPS	μF	P2 (kW)	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)	ММ	IN	ММ	IN	(KG)	LXWXH (MM)
32046	RSWE40-2	No	3.5	12.5	0.45	30	19.5	40	41	25	1"	25	1"	14.3	405x185x195
32114	RSWE40-2.PC	RPC25E												15.8	405x185x427
32053	RSWE60-2	No	4.8	20	0.75	30	34	70	45	25	1"	25	1"	15	430x185x195
32121	RSWE60-2.PC	RPC25E												16.5	430x185x427
32060	RSWE120-2	No	5.2	20	0.88	30	38	70	50	25	1"	25	1"	15.7	430x185x195
32138	RSWE120-2.PC	RPC25E												17.2	430x185x427
32077	RSWE145-2	No	8.6	31.5	1.1	30	50	80	66	40	1½"	25	1"	23.9	510x210x166
32145	RSWE145-2.PC	RPC25E												25.4	510x210x398