

SHALLOW WELL JET PUMP W PRESSURE TANK & DIGITAL SWITCH

RSWE SERIES



The REEFE self-priming jet pump has been specifically constructed for high demands of suction lift. Suitable for the supply of water to house and garden, stock watering troughs. 100% European made, guaranteeing superior quality and longer service life.

APPLICATIONS


- Clean water transfer
- Surface mounted shallow wells
- Spear point wells
- Garden sprinklers and irrigation
- Stock watering

FEATURES & BENEFITS

- Continuous rated motors to ensure long service life.
- Available in various combinations:
 - Pump only
 - Automatic Pressure Controller (PC)
 - Pressure Switch with Tank and Gauge (PTS)

CONSTRUCTION

- Cast Iron motor bracket and pump body
- Venturi in Noryl
- Grade 416 stainless steel shaft
- Built-in thermal overload protection
- Ceramic / Graphite mechanical seal
- Supplied with 18L Pressure Tank, EPS1 Pressure Switch & outlet
- 18L pressure tank with heavy duty butyl diaphragm and stainless threaded inlet

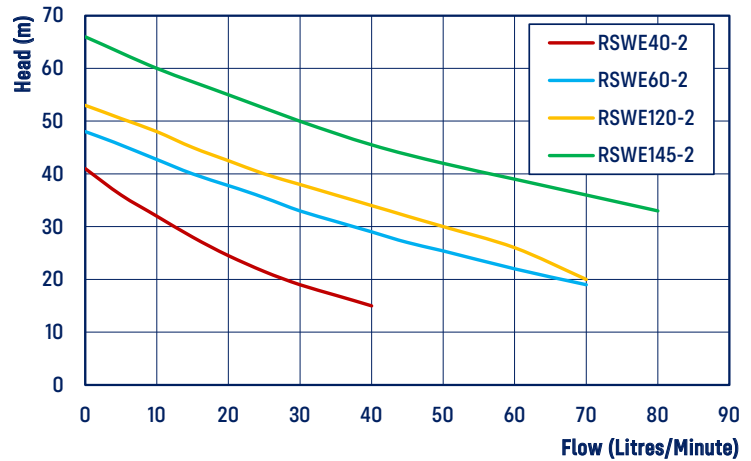

CODE	MODEL	POWER 240V			RATED		MAXIMUM		INLET		OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
		AMPS	μF	P2 (kW)	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)	MM	IN	MM	IN		
32527	RSWE40-2.PTS	3.5	12.5	0.45	30	19.5	40	41	25	1"	25	1"	18.55	405x185x640
32534	RSWE60-2.PTS	4.8	20	0.75	30	34	70	45	25	1"	25	1"	19.25	430x185x640
32541	RSWE120-2.PTS	5.2	20	0.88	30	38	70	50	25	1"	25	1"	21.5	430x185x640
32558	RSWE145-2.PTS	8.6	31.5	1.1	30	50	80	66	40	1½"	25	1"	28.15	510x210x611